
Guangzhou VanGaa Lighting Tech. Co., Ltd
Homepage: www.VanGaa.com, www.vangaalight.com
Email: info@vangaalight.com
Tel: 0086-20-86432439
Factory add: Building B, Langling Industry Park, Huaxing Industry Area, Xinhua Town, Huadu District, Guangzhou, China

wechat facebook youtube








VanGaa™

Theater & Show Lighting Catalogue

www.VanGaa.com



Industry Area of VanGaa Lighting Factory



A Corner of Workshop



A Scene of Showroom



A Corner of Technical Department



The Building of Sales Center



Reception Centre



Service Team of Oversea Market



Customers Visit Our Factory



Exhibition

About us

VanGaa--Achieving Users' Value!

Professional LED Studio Light & Stage Light Factory

VanGaa Lighting Co., Limited is an internationally recognized company that focus on energy efficient LED technology for professional studio and stage lighting fixtures. We are involved the business of lighting fixtures designing, manufacturing, selling, events and project designing, installation, after-sales service and others.

VanGaa Lighting is established on 2006 in Guangzhou, and we have made up our own factory on 2009 which owns three production lines now. We design and developed the professional studio lighting fixtures, such as the LED Fresnel Spot Light, LED Profile Spot Light, LED Meeting Room Panel Light, and the stage lighting fixtures, such as LED Moving Head Light, LED Par Light, Moving Head Light. Our company incorporates the latest in production processes and quality assurance to ensure that its products meet the highest standards of quality and refinement. The products made by this manufacturer strictly comply with ISO9001:2008, ISO14001:2004, CE and RoSH safety standards.

Our company's reputation is founded upon innovative, pragmatic design and manufacture of a focused and professional range of LED studio and stage lights. According to our principle "Achieving Users' Value", we design, manufacture and popularize the quality, professional and practical fixtures for studio and entertainment.

Our Principles
Environment friendly and Energy frugally, lighting the green world
Supply Reliable Quality Product
Deliver on Time
Offer Professional Technical support
Invest in R&D and stay at the forefront of technology
Rigorously test everything we make
Initiative to communicate with our customers

Innovation, Quality and Performance. We are Achieving Users' Value!





























VanGaa™
Stage & Studio Light

Contents

Page 01-14
LED Fresnel Spot Light Series

Page 15-28
LED Ellipsoidal Profile Spotlight Series

Page 29-36
LED Film Video Sky Panel Light Series

Page 37-40
LED Cyclorama Light Series

Page 41-58
Moving Head Light Series

Page 59-62
Matrix Blinder Light

Page 63-66
Follow Spot Light Series

Page 67-70
LED Wall Wash Light Series

Page 71-72
LED Strobe Light Series

Page 73-76
LED Par Light Series

Page 77-79
Control System Series

Page 80
Accessaries Series

Motorize Zoom LED Fresnel Daylight





CTO color · RDM · DMX 512 · Motorize ZOOM · 16 bit · CE · RoHS

Specification		
Product model	VG-DL450/VG-DL550	VG-DL450-C
Light sources	400W/500W high CRI COB LED Lamp	400W high CRI COB LED Lamp
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	450W/550W	450W
CRI	Ra≥95, or Ra≥97	Ra≥95, or Ra≥97
Color temp.	3200K/5600K	3200K-5600K
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	3CH, 4CH, 5CH, 14CH	4CH, 5CH, 6CH, 15CH
Beam angle	15-60degree, motorize zoom	15-60degree, motorize zoom
Cooling system	Copper tube convector+mute fan	Copper tube convector+mute fan
Control mode	DMX512/Demo/Manual	DMX512/Demo/Manual
IP rating	IP 20	IP 20
Accessories	Barn doors, power cable, signal cable	Barn doors, power cable, signal cable
Net weight	12kg	12kg
Body size	450*394*337mm	450*394*337mm

Product details







Brightness Mode

3CH	1	2	3
%	Dimmer	Strobe	Zoom


CTO Mode


4CH	1	2	3	4
%	Dimmer	CTO	Strobe	Zoom

Direct Mode

5CH	1	2	3	4	5
%	Dimmer	Warm White	Cold White	Strobe	Zoom







Features

- Equips 400W/500W brand high CRI high brightness LED chips, enough power for big space studio room;
- Use large copper tube radiator as the main parts of cooling system, and digital temperature sensor to control the noise of mute fan within 38-45db which suit the international studio room environment standard;
- 400W bi-color led chip is optional, which can make sure 3200K, 5600K, 4500K and other different color temperature output keep 200W to make sure the brightness;
- Intelligent control software has been used for this light. The light can controlled by DMX signal, and also can control color temperature and dimmer by rotary knob;
- High CRI 95Ra or 97Ra optional, flicker free; 0-100% linear dimmer smoothly.

Application



Details






Effect







60 degree



15 degree

Install Methods





Package






Motorize Zoom LED Fresnel Spot Light



Specification	
Product model	VG-PB300W-D/VG-PB200W-D/VG-PB100W-D
Light sources	300W/200W/100W high CRI COB LED Lamp
Input power	AC100-240V, 50/60Hz
Power	300W/200W/100W
CRI	Ra≥95, or Ra≥97
Color temp.	3200K/5600K
Dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons
DMX channel	3CH
Beam angle	15-60degree, motorize&manual zoom
Cooling system	Copper tube convector+mute fan
Control mode	DMX512/Demo/Manual
IP rating	IP 20
Accessories	Barn doors, power cable, signal cable
Net weight	7.5kg
Body size	455*265*292mm

Product details






Motorize Style DMX Channel

3CH	1	2	3
%	Dimmer	Zoom	Strobe



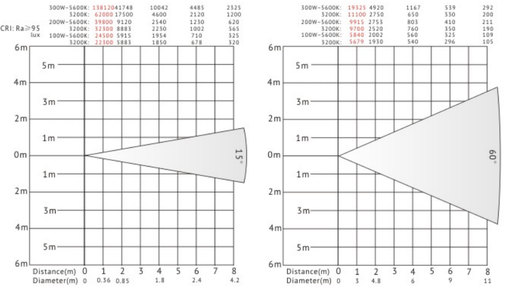

Features


- Equips 100W/200W/300W brand high CRI high brightness LED chips, different power optional;
- Use large copper tube radiator as the main parts of cooling system, and digital temperature sensor to control the noise of mute fan within 38-45db which suit the international studio room environment standard;
- Use screw to adjust the different beam angle from spot(15degree) to flood(60degree), motorize/DMX signal control the adjustment;
- Compact structure, beautiful appearance, unique, the housing, software, PCB and other inner structure is independent research and development by vangaa lighting;
- High CRI 95Ra or 97Ra optional, flicker free; 0-100% linear dimmer smoothly.

Application



Effect











Manufacturing















Package









Manual Zoom LED Fresnel Spot Light




Specification	
Product model	VG-PB300W/VG-PB200W/VG-PB100W
Light sources	300W/200W/100W high CRI COB LED Lamp
Input power	AC100-240V, 50/60Hz
Power	300W/200W/100W
CRI	Ra≥95, or Ra≥97
Color temp.	3200K/5600K
Dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons
DMX channel	1CH, 2CH
Beam angle	15-60degree, manual zoom
Cooling system	Copper tube convector+mute fan
Control mode	DMX512/Demo/Manual
IP rating	IP 20
Accessories	Barn doors, power cable, signal cable
Net weight	7.5kg
Body size	455*265*292mm

Product details










different style fresnel lens optional















Features


- Equips 100W/200W/300W brand high CRI high brightness LED chips, different power optional;
- Use large copper tube radiator as the main parts of cooling system, and digital temperature sensor to control the noise of mute fan within 38-45db which suit the international studio room environment standard;
- Use screw to adjust the different beam angle from spot(15degree) to flood(60degree), there is the rotary know to adjust the angle at the back control panel easily;
- Compact structure, beautiful appearance, unique, the housing, software, PCB and other inner structure is independent research and development by vangaa lighting;
- High CRI 95Ra or 97Ra optional, flicker free; 0-100% linear dimmer smoothly.


Application



Effect











Manufacturing













Package












Bi-color LED Fresnel Spot Light




Specification	
Product model	VG-PB200W-C/VG-PB200W-C-D/VG-PB400W-C
Light sources	200W/400W bi-color high CRI COB LED Lamp
Input power	AC100-240V, 50/60Hz
Power	250W
CRI	Ra≥95, or Ra≥97
Color temp.	3200K-5600K every color 100W/3200K-5600K every color 200W
Dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons
DMX channel	5CH, 6CH
Beam angle	15-60degree, manual zoom or motorize zoom
Cooling system	Copper tube convector
Control mode	DMX512/Demo/Manual
IP rating	IP 20
Accessories	Barn doors, power cable, signal cable
Net weight	7.5kg
Body size	455*265*292mm


Product details








VG-PB200W-C DMX Channel




VG-PB200W-C-D DMX Channel







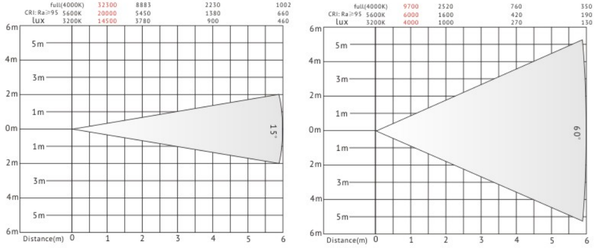

Features

- Equips 200W/400W bicolor brand high CRI high brightness LED chips, different power optional; The light output can keep 100W or 200W at different color temperature;
- Use large copper tube radiator as the main parts of cooling system, and digital temperature sensor to control the noise of mute fan within 38-45db which suit the international studio room environment standard;
- Use screw to adjust the different beam angle from spot(15degree) to flood(60degree), manual, motorize/DMX signal control the adjustment;
- Compact structure, beautiful appearance, unique, the housing, software, PCB and other inner structure is independent research and development by vangaa lighting;
- High CRI 95Ra or 97Ra optional, flicker free; 0-100% linear dimmer smoothly.

Application



Effect











Manufacturing













Package









Studio Room Noiseless LED Fresnel Spot Light(NO FAN)




No FAN | DMX 512 | Motorize ZOOM | 16 bit | CE | ROHS


Specification	
Product model	VG-PB100W-fanless/VG-PB100W-D-fanless
Light sources	100W high CRI COB LED Lamp
Input power	AC100-240V, 50/60Hz
Power	100W
CRI	Ra≥95, or Ra≥97
Color temp.	3200K/5600K
Dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons
DMX channel	1CH, 2CH
Beam angle	15-60degree, manual zoom/motorize zoom
Cooling system	Copper tube convector(no any fan)
Control mode	DMX512/Demo/Manual
IP rating	IP 20
Accessories	Barn doors, power cable, signal cable
Net weight	8.5kg
Body size	455*265*292mm

Product details




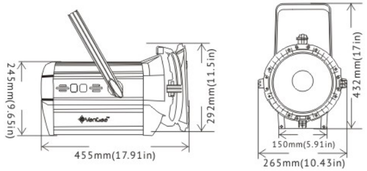







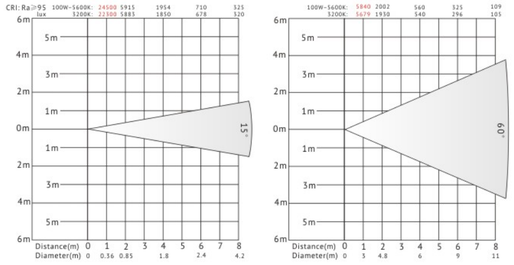

Features

- Equips 100W brand high CRI high brightness LED chips, small size can suitable for small space studio room;
- Use large copper tube radiator as the main parts of cooling system, no any fan inside of the light which can make sure the light is silent. This light can used for the scene which has very strict of noise;
- Use screw to adjust the different beam angle from spot(15degree) to flood(60degree), manual, or motorize/DMX signal control the adjustment;
- Compact structure, beautiful appearance, unique, the housing, software, PCB and other inner structure is independent research and development by vangaa lighting;
- High CRI 95Ra or 97Ra optional, flicker free; 0-100% linear dimmer smoothly.

Application



Effect







Manufacturing








Package







400W LED Fresnel Spot Light




Specification		
Product model	VG-PL400G	VG-PL400W
Light sources	400W RGBAL 5in1 LED lamp	400W high CRI COB LED Lamp
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	450W	450W
CRI	/	Ra≥92, or Ra≥95
Color	RGBAL 5in1 color mixing	3200K/5600K
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	12CH	4CH
Beam angle	15-65degree, manual zoom	15-65degree, manual zoom
Cooling system	Copper tube convector+mute fan	Copper tube convector+mute fan
Control mode	DMX512/Demo/Manual	DMX512/Demo/Manual
IP rating	IP 20	IP 20
Accessories	Barn doors, power cable, signal cable	Barn doors, power cable, signal cable
Net weight	13kg	13kg
Body size	407*337*312mm	407*337*312mm


Product details









13kg(28.66lb)

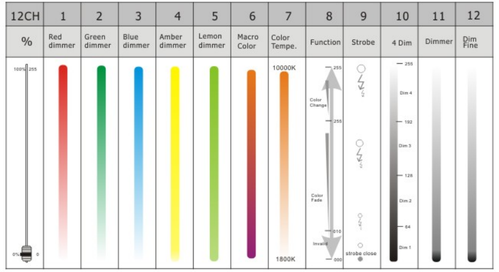






Color Correction 200W LED Fresnel Spot Light





Specification	
Product model	VG-PL250W
Light sources	200W high CRI COB LED Lamp
Input power	AC100-240V, 50/60Hz
Power	250W
CRI	Ra≥92
Color temp.	3200K/5600K
Dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons
DMX channel	4CH
Beam angle	15-65degree, manual zoom
Cooling system	Copper tube convector
Control mode	RDM, DMX512, Color correction
IP rating	IP 20
Accessories	Barn doors, power cable, signal cable
Net weight	6.5kg
Body size	546*346*270mm

Product details

















Manual Zoom LED Fresnel Spot Light





Specification	
Product model	VG-PB200D
Light sources	200W RGBW 4in1 COB LED Lamp
Input power	AC100-240V, 50/60Hz
Power	220W
CRI	/
Color	RGBW 4in1 color mixing
Dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons
DMX channel	9CH
Beam angle	15-60degree, manual zoom
Cooling system	Copper tube convector+mute fan
Control mode	DMX512/Demo/Manual
IP rating	IP 20
Accessories	Barn doors, power cable, signal cable
Net weight	8kg
Body size	455*265*292mm

Product details







9CH	1	2	3	4	5	6	7	8	9
%	General dimmer	Red dimmer	Green dimmer	Blue dimmer	White dimmer	Strobe	Preset color	Macro function	Speed






Color Correction 200W LED Fresnel Spot Light



Specification	
Product model	VG-PL250D
Light sources	200W RGBW 4in1 LED lamp
Input power	AC100-240V, 50/60Hz
Power	250W
CRI	/
Color temp.	RGBW color mixing
Dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons
DMX channel	11CH
Beam angle	15-65degree, manual zoom
Cooling system	Copper tube convector
Control mode	RDM, DMX512, Color correction
IP rating	IP 20
Accessories	Barn doors, power cable, signal cable
Net weight	7kg
Body size	546*346*270mm







VG-PL250D DMX Channel

11CH	1	2	3	4	5	6	7	8	9	10	11
%	Red dimmer	Green dimmer	Blue dimmer	White dimmer	Macro Color	Color Temp.	Function	Strobe	4 Dim	Dimmer	Dim Fine









Fixed Lens LED Ellipsoidal Spotlight




Specification		
Product model	VG-LVF400A/VG-LVF220A	VG-LVF400G/VG-LVF220D
Light sources	400W/200W high CRI COB LED Lamp	400W RGBAL 5in1/200W RGBW 4in1 LED lamp
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	450W/250W	450W/250W
CRI	Ra≥92	/
Color temp.	3200K/5600K optional	RGBAL/RGBW color mixing
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	4CH	12CH/11CH
Beam angle	14/19/26/36 degree	14/19/26/36 degree
Cooling system	Copper tube convector+mute fan	Copper tube convector+mute fan
Control mode	RDM, DMX512, Color correction	RDM, DMX512, Color correction
IP rating	IP 20	IP 20
Accessories	Gobo clip, color paper clip, cables	Gobo clip, color paper clip, cables
Net weight	11kg/10kg	11kg/10kg
Body size	589*302*265mm	589*302*265mm

Product details










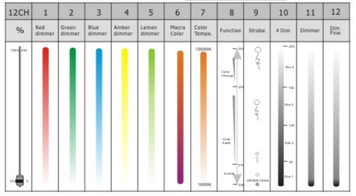





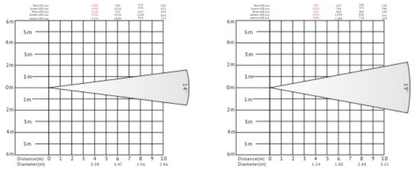

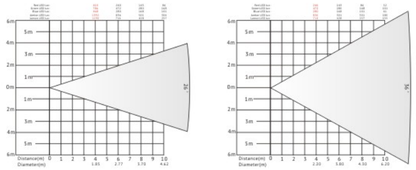

Features

- Brand 400W RGBAL 5in1 or 200W RGBW4in1 LED chips equips for this new designed LED profile spotlight, 5in1 RGB+Amber+Lemon can mix billions of different colors;
- The light use not only DMX 512 signal to control, but also the RDM technology. You can setting the ID address and checking the using situation on console easily;
- All the light will use the color correction test device to test, to make sure every color value are same although different manufacturing time;
- 1800K-10000K color temperature adjustable by DMX signal;
- 14, 19, 26, 36 degree different beam angle optional;
- 4 speed dimmer curve, 0-100% linear dimmer.

Application



Effect



Manufacturing, Package & Event



300W LED Profile Spot Light





Specification	
Product model	VG-LVF300A
Light sources	300W high CRI COB LED Lamp
Input power	AC100-240V, 50/60Hz
Power	350W
CRI	Ra≥85 or Ra ≥92 optional
Color temp.	3200K/5600K optional
Dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons
DMX channel	2CH
Beam angle	19/26/36/50 degree
Cooling system	Copper tube convector
Control mode	DMX512, manual
IP rating	IP 20
Accessories	Gobo clip, color paper clip, cables
Net weight	10.5kg
Body size	684*360*536mm


Product details




















Die-casting Aluminum LED Profile Spot Light



Specification			
Product model	VG-LVF230A	VG-LVF230B	VG-LVF230C
Light sources	High CRI 200W COB LED	High CRI 200W COB LED	High CRI 200W COB LED
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	250W	250W	250W
CRI	Ra≥95/Ra≥97 optional	Ra≥95/Ra≥97 optional	/
Color	3200K/5600K optional	3000-6700K adjustable	RGBW 4in1
Dimmer	0-100% linear dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons	LCD display+4 buttons
DMX channel	2CH	4CH, 5CH	9CH
Beam angle	13/19/26/36degree optional	19/26/36/50 degree optional	19/26/36/50degree optional
Cooling system	Copper tube convector	Copper tube convector	Copper tube convector
Control mode	DMX512/Demo/Manual	DMX512/Demo/Manual	DMX512/Demo/Manual
IP rating	IP 20	IP 20	IP 20
Accessories	Gobo clip, power cable, signal cable	Gobo clip, power cable, signal cable	Gobo clip, power cable, signal cable
Net weight	8kg	8kg	8kg
Body size	670*170*292mm	670*170*292mm	670*170*292mm

Product details



Manufacturing in Workshop

























ABS Housing LED Ellipsoidal Spotlight




Specification


Product model	VG-LVF200A	VG-LVF200B	VG-LVF200C
Light sources	High CRI 200W COB LED	High CRI 200W COB LED	High CRI 200W COB LED
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	250W	250W	250W
CRI	Ra≥85/Ra≥95 optional	Ra≥85/Ra≥95 optional	Ra≥85/Ra≥95 optional
Color	3200K/5600K optional	3000-6700K adjustable	RGBW 4in1
Dimmer	0-100% linear dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons	LCD display+4 buttons
DMX channel	2CH	3CH	9CH
Beam angle	13/19/26/36degree optional	19/26/36/50 degree optional	19/26/36/50degree optional
Cooling system	Copper tube convector	Copper tube convector	Copper tube convector
Control mode	DMX512/Demo/Manual	DMX512/Demo/Manual	DMX512/Demo/Manual
IP rating	IP 20	IP 20	IP 20
Accessories	Gobo clip, power cable, signal cable	Gobo clip, power cable, signal cable	Gobo clip, power cable, signal cable
Net weight	6.4kg	6.4kg	6.4kg
Body size	660*360*465mm	660*360*465mm	660*360*465mm

Product details













VG-LVF200A DMX Channel




VG-LVF200B DMX Channel









Features

- Equips ETC style high precision glass lens group, which make the light output is very clear, uniform. Can cut sharp margin spot or misty margin spot;
- Use high brightness high CRI brand LED chips as the light source, the light has very good output lux;
- Choose ABS as the housing materials, the light is very light, not very heavy for installation;
- 3200K, 5600K, Bicolor, or RGBW 4in1 different style are optional for different use scene;
- High CRI can reach 92Ra, 97Ra are optional;
- 19, 26, 36, 50 degree different beam angle optional;
- Very good cooling system, silent and powerful.

Application



Accessories



gobo holder



color paper frame



iris


Effect













Manufacturing & Package













LED Profile Spotlight




RGBW · DMX 512 · 16 bit · DIM 4 Dimming Curves · Flicker Free TV & Film · CE · ROHS

Specification

Product model	VG-LVF150A	VG-LVF150C
Light sources	180W high CRI COB LED Lamp	180W RGBW 4in1 LED lamp
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	200W	200W
CRI	Ra≥92	/
Color temp.	3200K/5600K optional	RGBW 4in1 color mixing
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	3CH	9CH
Beam angle	19/26/36/50 degree	19/26/36/50 degree
Cooling system	Copper tube convector	Copper tube convector
Control mode	DMX512, manual	DMX512, manual
IP rating	IP 20	IP 20
Accessories	Gobo clip, color paper clip, cables	Gobo clip, color paper clip, cables
Net weight	7.5kg	7.5kg
Body size	645*260*250mm	645*260*250mm

Product details



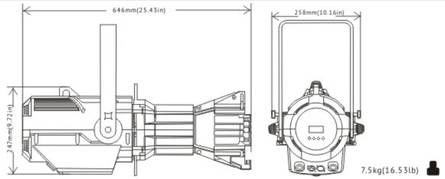

VG-LVF150A DMX Channel


3CH	1	2	3
%	Dimmer	Strobe	4 Dim

VG-LVF150C DMX Channel

9CH	1	2	3	4	5	6	7	8	9
%	Red dimmer	Green dimmer	Blue dimmer	White dimmer	Color Tempe.	Strobe	Dimmer	Rainbow Effect	Demo





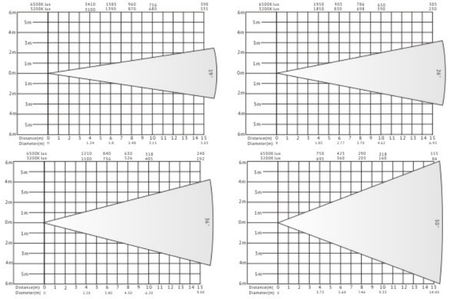

Features

- Equips high precision acrylic lens group, which make the light output is very soft and uniform. Can cut sharp margin spot or misty margin spot;
- Use high brightness high CRI brand LED chips as the light source, the light has very good output lux;
- Choose ABS as the housing materials, the light is very light, not very heavy for installation;
- 3200K, 5600K, Bicolor, or RGBW 4in1 different style are optional for different use scene;
- High CRI can reach 92Ra, flicker free which can suitable for video or photo taking;
- 19, 26, 36, 50 degree different beam angle optional;
- Very good cooling system, silent and powerful.

Application



Accessories



gobo holder




color paper frame



iris

Effect



Manufacturing & Package




200W LED Profile Spotlight



Specification			
Product model	VG-LVF210A	VG-LVF210B	VG-LVF210C
Light sources	200W high CRI COB LED Lamp	200W bi-color LED Lamp	200W RGBW 4in1 COB LED Lamp
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	200W	200W	200W
CRI	Ra≥92	Ra≥92	/
Color temp.	3200K/5600K optional	3200K-5600K bi color	/
Dimmer	0-100% linear dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons	LCD display+4 buttons
DMX channel	3CH	5CH	9CH
Beam angle	19/26/36/50 degree	19/26/36/50 degree	19/26/36/50 degree
Cooling system	Copper tube convector+mute fan	Copper tube convector+mute fan	Copper tube convector+mute fan
Control mode	DMX512, Color correction	DMX512, Color correction	DMX512, Color correction
IP rating	IP 20	IP 20	IP 20
Accessories	DMX Cable; Power cable	DMX Cable; Power cable	DMX Cable; Power cable
Net weight	8kg	8kg	8kg
Body size	648*194*194mm	648*194*194mm	648*194*194mm

Product details



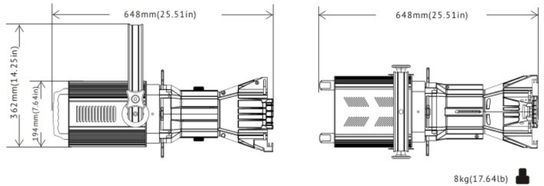

VG-LVF210A DMX Channel

3CH	1	2	3
%	Dimmer	Strobe	4 Dim

VG-LVF210C DMX Channel

9CH	1	2	3	4	5	6	7	8	9
%	Red dimmer	Green dimmer	Blue dimmer	White dimmer	Color	Function	Strobe	Dim 4	Dimmer




MINI 60W Zoom LED Profile Spotlight



Specification	
Product model	VG-LVF60Z
Light sources	High CRI 60W White COB LED
Input power	AC100-240V, 50/60Hz
Power	80W
CRI	>Ra92
Color	warm white/cold white
Dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons
DMX channel	3CH
Beam angle	15-35degree, manual zoom
Cooling system	Copper tube convector+mute fan
Control mode	DMX512/Demo/Manual
IP rating	IP 20
Accessories	Barn doors, power cable, signal cable
Net weight	3.5kg
Body size	350*180*160mm


Product details



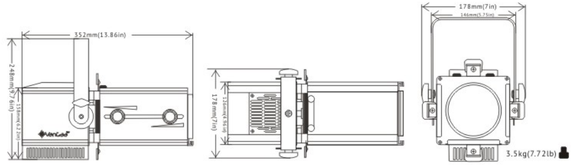

3CH	1	2	3
%	Dimmer	Strobe	Dim4






Zoom Lens LED Ellipsoidal Spotlight




Specification		
Product model	VG-LVF400Z-G-D/VG-LVF200Z-G-D	VG-LVF400Z-G/VG-LVF400Z/VG-LVF220Z-G
Light sources	400W/200W RGBAL high CRI COB LED Lamp	400W RGBAL 5in1/3200K/5600K/200W RGBAL 5in1 LED lamp
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	450W/250W	450W/250W
CRI	Ra≥92	Ra≥92
Color temp.	1800-10000K	1800-10000K/3200K/5600K
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	16CH	16CH/4CH/16CH
Beam angle	19-50 degree, motorize zoom	19-50 degree, manual zoom
Cooling system	Copper tube convector+mute fan	Copper tube convector+mute fan
Control mode	RDM, DMX512, Color correction	RDM, DMX512, Color correction
IP rating	IP 20	IP 20
Accessories	Gobo clip, color paper clip, cables	Gobo clip, color paper clip, cables
Net weight	13.5kg/12kg	13.5kg/12kg
Body size	648*340*213mm	648*340*213mm


Product details








13.5kg(29.76lb)










Features

- Brand 400W/200W RGBAL 5in1 LED chips equips for this new designed LED profile spotlight, 5in1 RGB+Amber+Lemon can mix billions of different colors;
- The light use not only DMX 512 signal to control, but also the RDM technology. You can setting the ID address and checking the using situation on console easily;
- All the light will use the color correction test device to test, to make sure every color value are same although different manufacturing time;
- 1800K-10000K color temperature adjustable by DMX signal;
- Motorize adjust to control the slice which can realize cut different shape by DMX signal remotely;
- 19-50 degree beam angle adjustable by manual, or by motorize;
- 4 speed dimmer curve, 0-100% linear dimmer.

Application



Effect

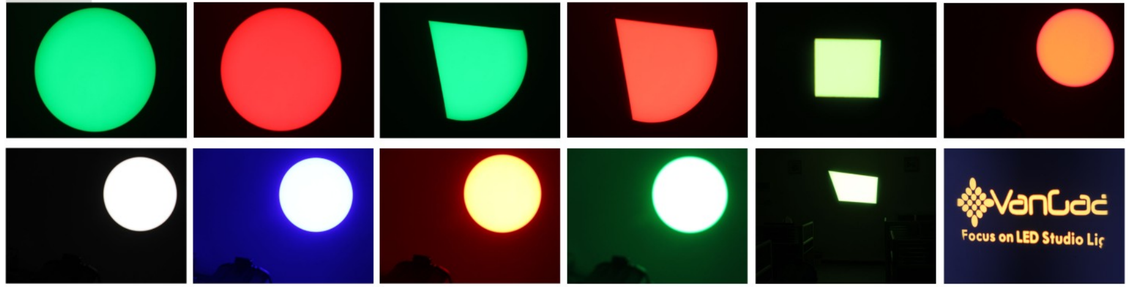

Manufacturing, Package & Event




Zoom Lens LED Ellipsoidal Spotlight



Specification			
Product model	VG-LVF300Z	VG-LVF200Z	VG-LVF160Z-B
Light sources	300W high CRI COB LED Lamp	200W high CRI COB LED Lamp	200W high CRI COB LED Lamp
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	350W	250W	250W
CRI	Ra≥92	Ra≥92	Ra≥92
Color temp.	3200K/5600K optional	3200K/5600K optional	3200K-5600K optional
Dimmer	0-100% linear dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons	LCD display+4 buttons
DMX channel	3CH	3CH	5CH
Beam angle	17-50 degree	17-50 degree	17-50 degree
Cooling system	Copper tube convector	Copper tube convector	Copper tube convector
Control mode	DMX512, Color correction	DMX512, Color correction	DMX512, Color correction
IP rating	IP 20	IP 20	IP 20
Accessories	DMX Cable; Power cable	DMX Cable; Power cable	DMX Cable; Power cable
Net weight	10.5kg	10kg	10kg
Body size	618*194*200mm	618*194*200mm	618*194*200mm

Product details





VG-LVF300Z/VG-LVF200Z DMX Channel


3CH	1	2	3
%	Dimmer	Strobe	4 Dim


VG-LVF160Z-B DMX Channel

5CH	1	2	3	4	5
%	General Dimmer	Fixed Color Temp.	WW Dimmer	CW Dimmer	Strobe










Features

- 200W, 300W different power led chips are optional for this light; Bi-color 200W is optional;
- This is the stable design light which is very cost performance;
- Manual control the slices which very easy cut different shape of light;
- 17-50 degree beam angle adjustable by manual, have manual focus function;
- 4 speed dimmer curve, 0-100% linear dimmer.

Application



Effect & Manufacturing

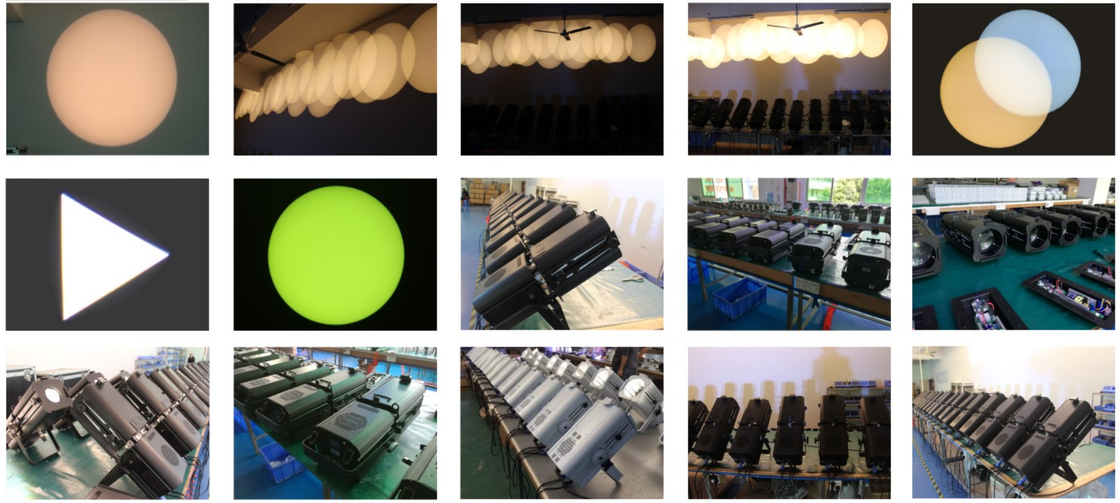


150W Colorful LED Video Film Sky Panel Light



Specification	
Product model	Color Panel 1440G
Light sources	480pcs 0.5W RGB 3in1 LEDs+480pcs 0.5W Warm White LEDs+480pcs 0.5W Cold White LEDs
Input power	AC100-240V, 50/60Hz; and DC24-36V
Light output	150W for every colors(Red, Green, Blue, Warm White and Cold White)keep similar brightness
CRI	Ra≥95
Color temp.	Kelvin 2500-9900K, DMX and Rotary Knob adjustable
Dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons
DMX channel	7CH(GEL Mode), 7CH(RGB Mode) and 4CH(White Mode)
Beam angle	120 degree(90° /60° honeycomb louver optional)
Cooling system	Copper tube convector
Control mode	DMX512; RDM; Kelvin Temperature; Hue Angle; Saturation; Wireless Solution Receive
IP rating	IP 20
Accessories	DMX Cable; Power cable
Net weight	7.5kg
Body size	730*153*347mm

Product details



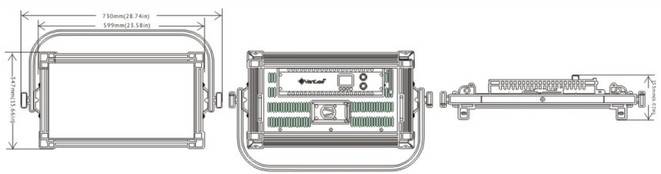

GEL/HUE Mode

7CH	1	2	3	4	5	6	7
%	Dimmer	Dimmer fine	CCT (Kelvin)	G/W	GEL List	Hue angle	Saturation

RGB Color Mode

7CH	1	2	3	4	5	6	7
%	Dimmer	Dimmer fine	CCT (Kelvin)	G/W	Red	Green	Blue

White Mode

4CH	1	2	3	4
%	Dimmer	Dimmer fine	CCT (Kelvin)	G/W



Features


- Use RGB, warm white and cold white as the basic light source, which can meet the request of different color for studio, film, video taking and other scene;
- The drive technology can reazlie different color have the similar output power when using. The light output can keep arrount 150W during using;
- High CRI more than 95Ra, flicker free, 0-100% linear dimmer;
- Kelvin 2500-9900K color temperature adjustable by DMX, RDM and rotary knob, very easy for using;
- Equips Wireless Solution Chips for signal receive, can remote control easily;
- Support DC24-36V different style battery.

Application



Optional Accessory


Barndoors


Honeycomb Louver



Battery(2h for full brightness)


Snap Grid


Tripods


Carry Bag

Different Color Effect

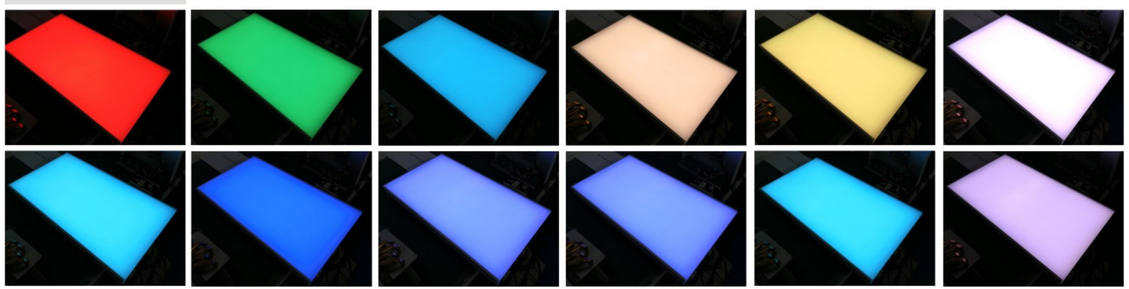


High Power LED Video Sky Panel Light




Specification		
Product model	VG-HTC1568C	VG-HTC1568
Light sources	1568pcs bi-color 0.2W led lamps	1568pcs 3200/5600K 0.2W led lamps
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	200W	200W
CRI	Ra≥95/97	Ra≥95/97
Color temp.	3200K-5600K optional	3200K/5600K optional
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	4CH/5CH	3CH/4CH
Beam angle	120 degree	120 degree
Cooling system	Copper tube convector	Copper tube convector
Control mode	DMX512, Master/slave, Auto-run	DMX512, Master/slave, Auto-run
IP rating	IP 20	IP 20
Accessories	Gobo clip, color paper clip, cables	Gobo clip, color paper clip, cables
Net weight	8.2kg	8.2kg
Body size	675*320*93mm	675*320*93mm


Product details





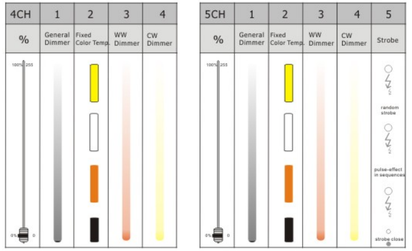






Features

- Bicolor, 3200K, 5600K are optional for this slim led sky panel video light;
- The drive technology can realize different color have the similar output power when using. The light output can keep around 170W during using;
- High CRI more than 95Ra(97 optional), flicker free, 0-100% linear dimmer;
- The light without any fan, silent for studio room using;
- Slim appearance, compact structure, unique design style.

Application



Effect & Manufacturing

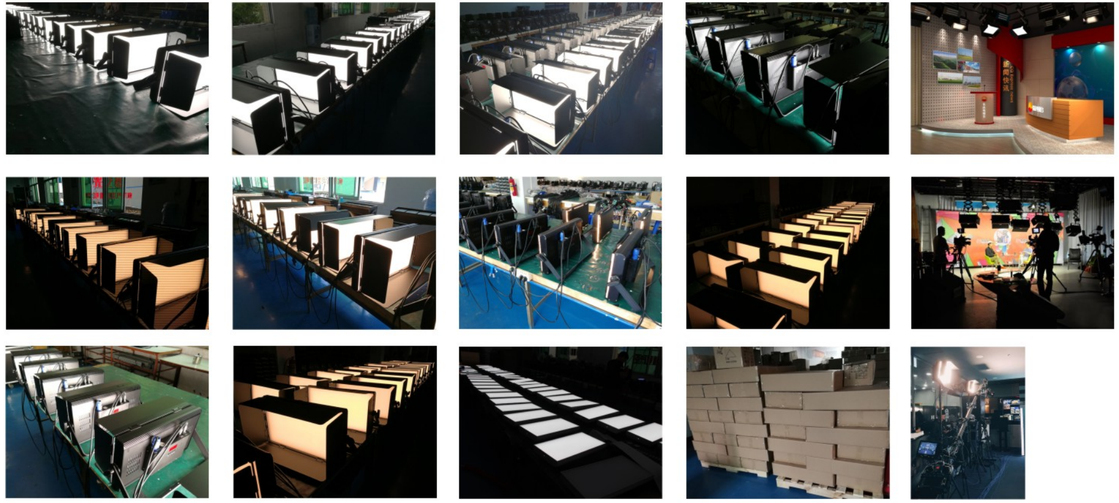


LED Soft Video Sky Panel Light





Specification		
Product model	VG-HTC1200C	VG-HTC630
Light sources	1200pcs 0.2W high CRI LED	630pcs 0.2W high CRI LED
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	120W	120W
CRI	Ra≥95	Ra≥92; or Ra≥97
Color temp.	3200K-5600K adjustable	3200K/5600K optional
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	4CH/5CH	1CH/2CH
Beam angle	120 degree	120 degree
Cooling system	Natural cooling, no fan	Natural cooling, no fan
Control mode	DMX512/Demo/Manual	DMX512/Demo/Manual
IP rating	IP 20	IP 20
Accessories	Barndoor; DMX and Power cable	Barndoor; DMX and Power cable
Net weight	5.5kg	5.5kg
Body size	570*265*109mm	570*265*109mm


Product details






















LED Soft Video Sky Panel Light





Specification		
Product model	VG-HTC490C	VG-HTC490
Light sources	1200pcs bi-color 0.2W led lamps	1200pcs 3200K/5600K 0.2W led lamps
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	200W	200W
CRI	Ra≥95	Ra≥95
Color temp.	3200K-5600K adjustable	3200K/5600K optional
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	4CH/5CH	1CH/2CH
Beam angle	120 degree	120 degree
Cooling system	Natural cooling, no fan	Natural cooling, no fan
Control mode	DMX512, Master/slave, Auto-run	DMX512, Master/slave, Auto-run
IP rating	IP 20	IP 20
Accessories	Barndoor; DMX cable; Power cable	Barndoor; DMX cable; Power cable
Net weight	9kg	8.2kg
Body size	480*270*127mm	480*270*127mm

Product details





















LED Soft Video Sky Panel Light



Specification			
Product model	VG-HTC480C	VG-HTC480	VG-HTC480D
Light sources	240pcs 0.5W 3200K and 240pcs 0.5W 5600K LEDs	480pcs 0.5W 3200K/ 5600K high CRI LED	480pcs 0.5W RGBW 4in1 LED Chips
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	200W	200W	200W
CRI	Ra≥90	Ra≥90	/
Color temp.	3200K-5600K adjustable	3200K/5600K optional	1800K-10000K optional
Dimmer	0-100% linear dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons	LCD display+4 buttons
DMX channel	6CH	4CH	11CH
Beam angle	170 degree	170 degree	170 degree
Cooling system	Natural cooling, no fan	Natural cooling, no fan	Natural cooling, no fan
Control mode	DMX512/Demo/Manual	DMX512/Demo/Manual	DMX512/Demo/Manual
IP rating	IP 20	IP 20	IP 20
Accessories	Barndoor; DMX and Power cable	Barndoor; DMX and Power cable	Barndoor; DMX and Power cable
Net weight	6kg	6kg	6kg
Body size	542*266*128mm	542*266*128mm	542*266*128mm

Product details



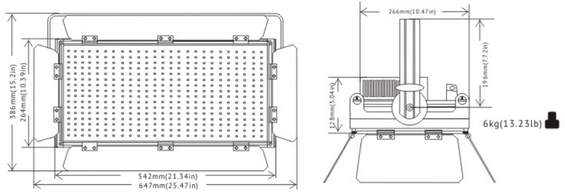

VG-HTC480C DMX Channel


6CH	1	2	3	4	5	6
%	3200K dimmer	5600K dimmer	Strobe	4 Dim	Dimmer	Dim Fine


VG-HTC480 DMX Channel

4CH	1	2	3	4
%	Dimmer	Dim Fine	Strobe	Dim 4










Features

- Bicolor, 3200K, 5600K, RGBW 4in1 are optional for this slim led sky panel video light;
- Use intelligent software, can realize 1800K-10000K color temperature adjustable
- High CRI more than 92Ra(95 optional), flicker free, 0-100% linear dimmer with 4 speed dimmer curve;
- The light without any fan, silent for studio room using;
- Slim appearance, compact structure, unique design style.

Application



Effect & Manufacturing

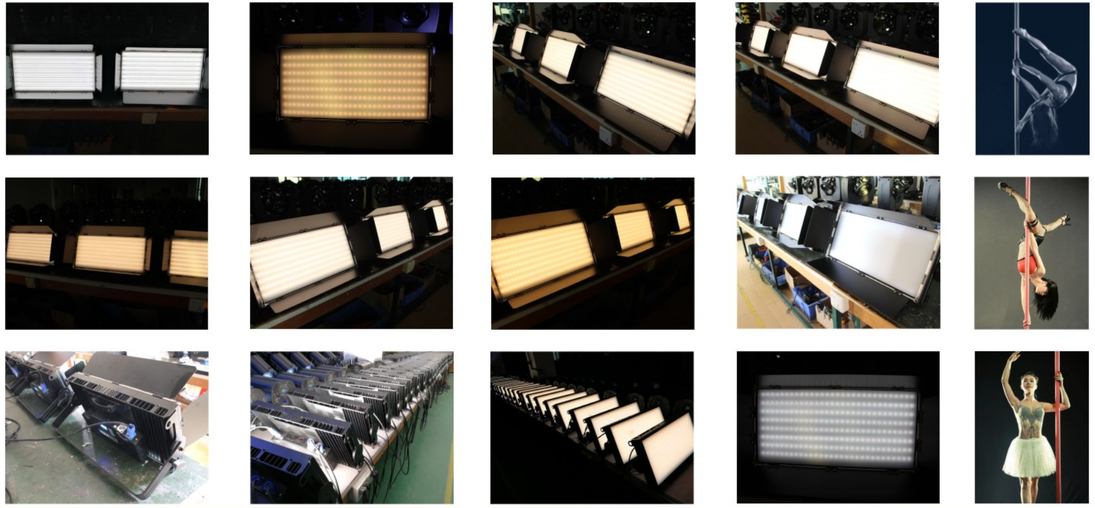

High Power LED Cyclorama Light




Specification		
Product model	VG-LB1300L	VG-LB1300C
Light sources	100pcs 3W high brightness LED Lamps, (warm white: 52; cold white: 48)	100pcs seven colors brand led lamps, (R:24; G:18; B:12; Royal blue: 8; Cyan: 8; Amber: 12; Lime green: 20)
Input power	AC100-240V, 50/60Hz	AC100-240V, 50/60Hz
Power	300W	300W
CRI	Ra≥95	Ra≥90
Color temp.	3200K-5600K adjustable	2700-8000K adjustable
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	9CH	7CH/9CH/11CH/15CH/17CH/22CH
Beam angle	30/25/15 degree	30/25/15 degree
Cooling system	Copper tube convector + mute fan	Copper tube convector + mute fan
Control mode	DMX512/Demo/Manual	DMX512/Demo/Manual
IP rating	IP 20	IP 20
Accessories	DMX and Power cable	Barndoor; DMX and Power cable
Net weight	9.5kg	9.5kg
Body size	630*180*260mm	630*180*260mm


Product details





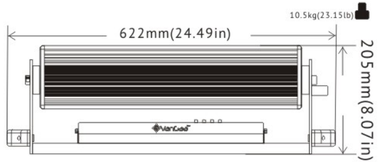

VG-LB1300C DMX Channel Layout












VG-LB1300L DMX Channel Layout











There are HSIC 7CH, SSP 11CH, TOUR 14CH, TOUR 22CH, PIXEL 9CH, PIXEL 17CH options


Features


- Equips brand 7 colors led chips, can mix different color for theater using, bicolor one is optional;
- Use intelligent software, can realize 2700K-8000K color temperature adjustable;
- High CRI more than 92Ra(95 optional), flicker free, 0-100% linear dimmer;
- 200W powerful led cyclorama light which can suitable for different scene of theater and others;
- Compact structure, unique design style;
- Equips import different degree optics, 10/30/80 different degree optional.


Application



Effect, Manufacturing & Package
































Color Correction 400W LED Cyclorama Light



RGB Rb² A | Bi-color | DMX 512 | 16 bit | Support TV & Film | CE | RoHS

LED Cyclorama Light Series


Specification	
Product model	VG-LB2600
Light sources	200pcs seven colors brand led lamps, (R:48; G:32; B:24; Royal blue: 16; Cyan: 16; Amber: 24; Lime green: 40)
Input power	AC100-240V, 50/60Hz
Power	400W
CRI	Ra≥97
Color quality	>90, from 2700K-8000K
Color range	>1670 thousand colors
Color mixing system	HSIC(brightness/hue/saturability/color temperature)
Control panel	LCD display+4 buttons
DMX channel	7CH/9CH/11CH/15CH/17CH/22CH
Cooling system	mute fan
Beam angle	30° for first head, 80° for second head, motorzile adjust the head
IP rating	IP 20
Accessories	Barndoor; DMX cable; Power cable
Net weight	15kg
Body size	D617*W310*H328mm


Product details






















There are HSIC 7CH, SSP 11CH, TOUR 14CH, TOUR 22CH, PIXEL 9CH, PIXEL 17CH options

108x3W LED Cyclorama Light



DMX 512 | 16 bit | Support TV & Film | CE | RoHS


LED Cyclorama Light Series

Specification	
Product model	VG-LB1083
Light sources	108pcs 3W LED lamps
Input power	AC100-240V, 50/60Hz
Power	350W
Quantity of LED	R: 27; G: 27; B: 27; W: 27
Life span of LED	50000h
Dimmer	0-100% linear dimmer
Control panel	digital display+4 buttons
DMX channel	8CH
Beam angle	60*120degree
Cooling system	High quality radiator, fan without noise
Control mode	DMX512/Demo/Manual
IP rating	IP 20
Accessories	Barn doors, power cable, signal cable
Net weight	8.5kg
Body size	480*270*127mm


Product details





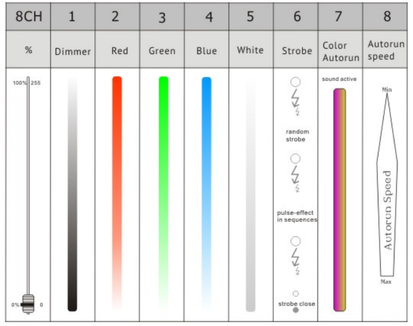















300W CMY LED Moving Head Spot Beam Wash Light



Specification	
Product model	VG-LM300C
Light sources	300W High Output white 6000K COB LED lamp
Input power	AC90-240V, 50/60Hz
Power	450W
Light output	45200lux@4m, 11°, 4760lux@4m, 46°
Life span of LED	50000h
Zoom angle	11-46°
Dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons
DMX channel	25CH, 21CH
Working temp.	-25-+45℃
Cooling system	High quality mute fans
Control mode	DMX512/Master-slave/Auto-run/Sound active
IP rating	IP 20
Accessories	Hanging bridge, power cable, signal cable
Net weight	20kg
Body size	393Dx305Wx644Hmm

Product details





25CH	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
%	Pan	Pan fine	Tilt	Tilt fine	Pan/Tilt Speed	Dimmer	Dimmer Fine	Strobe	Cyan	Magenta	Yellow	Color 1	Color 2	Color 3	Static Gobo Wheel	Rotation Gobo Wheel	Rotation gobo Wheel rotating	Focus	Focus Fine	Zoom	Zoom Fine	Prism	Prism rotation	Iris	Frost




Features

- 300W LED with CMY function, real 4in1 lights with spot, beam and wash, can suitable different performance scenes;
- The CMY function can mix different billions of different true colors for your stage;
- 11-46degree zoom angle can meet the big scenes using, 3 face or 8 face prism optional;
- High quality LED chips has been used, you are not need change the lamp, the lifespan can reach 50000h;
- Atomization, zoom, prism, iris all the moving head function has been included, can make wonderful stage effect;
- Has 1pc static and 1pc rotation gobo whell, custom can customize the different gobo pattern design;
- The inside function modules are all aluminium design, the whole light is not very heavy.


Application



Effect

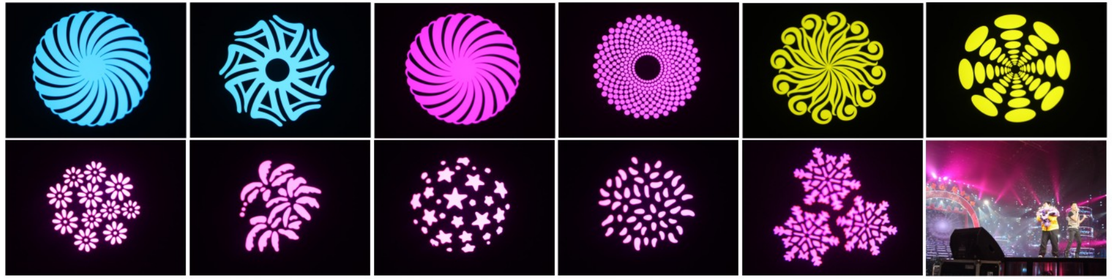

Manufacturing&Package

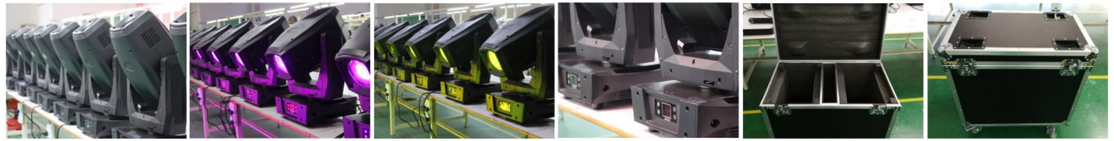

200W 3in1 LED Moving Head Spot Beam Light




LED Moving Head Light Series


Specification	
Product model	VG-LM200C
Light sources	200W High Output white 7500K COB LED lamp
Input power	AC90-240V, 50/60Hz
Power	300W
Light output	25200lux@4m, 7°, 3260lux@4m, 21°
Life span of LED	50000h
Zoom angle	7-21°
Dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons
DMX channel	18CH
Working temp.	-25-+45℃
Cooling system	High quality mute fans
Control mode	DMX512/Master-slave/Auto-run/Sound active
IP rating	IP 20
Accessories	Hanging bridge, power cable, signal cable
Net weight	15.5kg
Body size	343Dx239Wx537Hmm

Product details



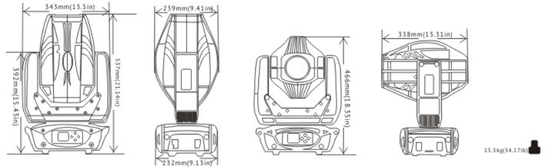

18CH	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
%	Pan	Pan fine	Tilt	Tilt fine	Pan/Tilt Speed	Dimmer	Strobe	Color wheel	Gobo wheel	Rotating gobo	Rotating gobo rotates	Prism	Prism rotation	Frost	Focus	Zoom	Macro	Reset
100% 255 0%					normal blackout by wheels blackout by moving Max Moving Speed Min		random strobe pulse-effect in sequences strobe close							max frost open		beam: 7°-21°	Macro	reset SHARK

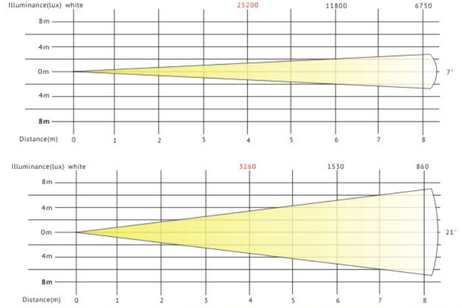

150W LED Moving Head Spot Light





LED Moving Head Light Series

Specification	
Product model	VG-LM150S
Light sources	150W High Output white COB LED lamp
Input power	AC90-240V, 50/60Hz
Power	250W
Light output	3450lux@5m, white color
Life span of LED	50000h
Beam angle	15degree, with focus function
Dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons
DMX channel	16/14/12/10CH
Working temp.	-25-+45℃
Cooling system	High quality mute fans
Control mode	DMX512/Master-slave/Auto-run/Sound active
IP rating	IP 20
Accessories	Hanging bridge, power cable, signal cable
Net weight	11.5kg
Body size	270*270*470mm

Product details




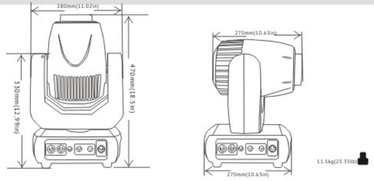

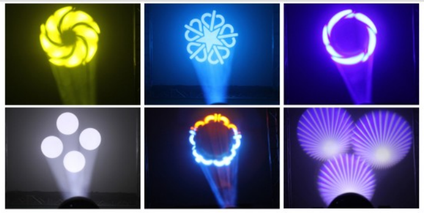

10CH	1	2	3	4	5	6	7	8	9	10
%	Pan	Tilt	Pan/Tilt Speed	Dimmer	Strobe	Color wheel	Static gobo wheel	Focus	Prism	Prism rotation
100% 255 0%			normal blackout by wheels blackout by moving Max Moving Speed Min		random strobe pulse-effect in sequences strobe close					



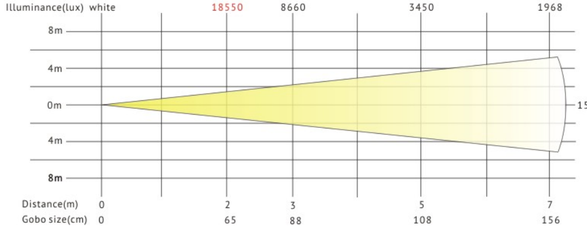

150W LED Moving Head Beam Sharpy Light




VG-LMB150A VG-LMB150A

Specification		
Product model	VG-LMB150A	VG-LMB150B
Light sources	1pcs pure white 150W LED Lamp	1pcs pure white 150W LED Lamp
Input power	AC90-240V, 50/60Hz	AC90-240V, 50/60Hz
Power	250W	150W
Light output	338800 Lux@ 1m2°	657600 Lux@ 1m2°
Life span of LED	50000h	50000h
Zoom angle	2°	2°
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	13CH	13CH
Working temp.	-25-+45℃	-25-+45℃
Cooling system	High quality mute fans	High quality mute fans
Control mode	DMX512/Master-slave/Auto-run/Sound active	DMX512/Master-slave/Auto-run/Sound active
IP rating	IP 20	IP 20
Accessories	Hanging bridge, power cable, signal cable	Hanging bridge, power cable, signal cable
Net weight	12kg	12kg
Body size	300Dx200Wx490Hmm	295Dx198Wx481Hmm


Product details






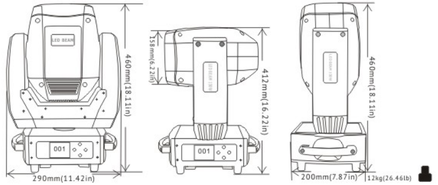

13CH	1	2	3	4	5	6	7	8	9	10	11	12	13
%	Pan	Pan fine	Tilt	Tilt fine	Pan/Tilt Speed	Dimmer	Shutter	Color wheel	Gobo wheel	Prism	Prism rotation	Focus	Macro

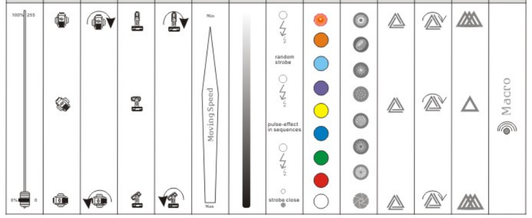



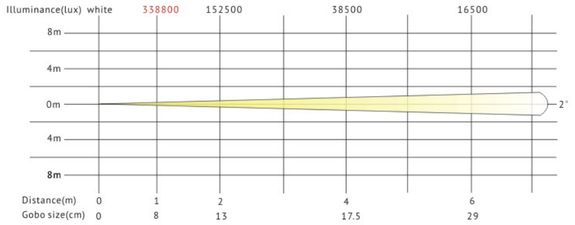


Features

- Equips 150W LED lamp, and added the high precision convex lens to make the light brightness enough, which can replace the 230W 7R easily;
- 2 degree beam angle, make sure the light output is narrow and parallel;
- 8 face or 16 face prism to make the prism effect is wonderful;
- High quality LED chips has been used, the lifespan can reach 50000h, you are not need change the lamp often compare with the moving head light;
- Small size design, the light is not very heavy only 12kgs, which is smart and powerful.

Application



Effect

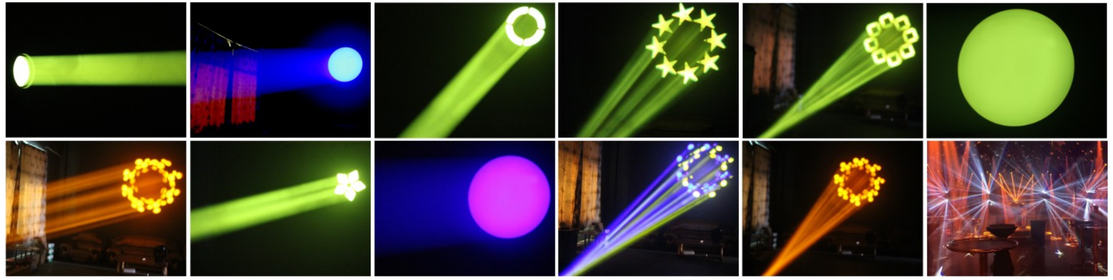

Manufacturing&Package



Aura 19x25W OSRAM LED Moving Head Zoom Wash Light




Specification		
Product model	Swift 1925Z-N	Swift 1925Z
Light sources	19pcs 25W RGBW 4in1 OSRAM brand LED lamps	19pcs 25W RGBW 4in1 OSRAM brand LED lamps
Input power	AC90-240V, 50/60Hz	AC90-240V, 50/60Hz
Power	500W	500W
Light output	108500lux@ 1m15°full, 41089lux@1m60°	108500lux@ 1m15°full, 41089lux@1m60°
Life span of LED	50000h	50000h
Zoom angle	15-60°	15-60°
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	14CH	14CH
Working temp.	-25-+45℃	-25-+45℃
Cooling system	High quality mute fans	High quality mute fans
Control mode	DMX512/Master-slave/Auto-run/Sound active	DMX512/Master-slave/Auto-run/Sound active
IP rating	IP 20	IP 20
Accessories	Hanging bridge, power cable, signal cable	Hanging bridge, power cable, signal cable
Net weight	9.2kg	9.5kg
Dimension	348Dx208Wx381Hmm	325Dx188Wx395Hmm

Product details




As same as Martin Aura channel layout, can call the scan library to control directly


14CH	1	2	3	4	5	6	7	8	9	10	11	12	13	14
%	Shutter	Beam Dimmer	Zoom	Pan	Pan fine	Tilt	Tilt fine	Fixtures Control setting	Color wheel effect	Red	Green	Blue	White	Beam CCT

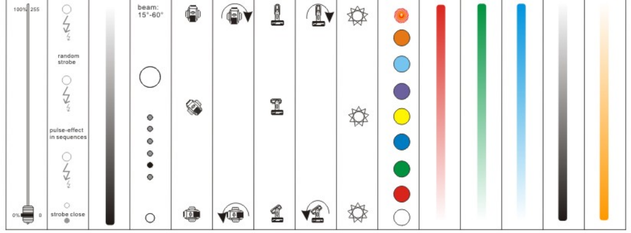







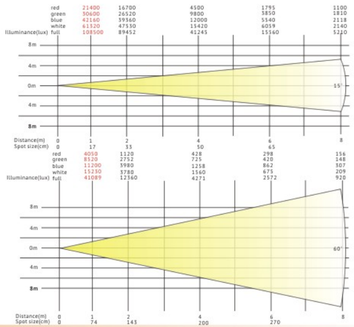

Features


- New design 19pcs 25W LED zoom wash light, which is powerful and brightness;
- 15-60degree zoom effect, from spot to flood can meet different performance scenes;
- Same DMX layout as the Martin Aura 14CH, you can use the same scan library control the light directly, no need edit again;
- Three phase motors for pan and tilt, moving very fast;
- Equips mute fan, and silent belts for moving, suitable for some scenes have the strict noise request.


Application




Old Version







Effect, Manufacturing&Package

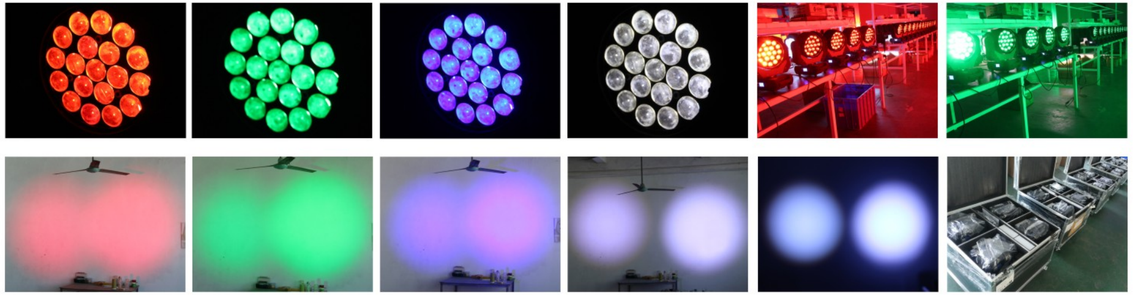

Aura 37pcs RGBW 4in1 LED Moving Head Beam Wash Light




Specification	
Product model	Swift 3710Z
Light sources	37pcs 12W RGBW 4in1 LED lamp
Input power	AC90-240V, 50/60Hz
Power	450W
Beam angle	10-60degree
Control mode	DMX-512; Master/slave; Demo
Control panel	LCD display+4 buttons
DMX channel	14CH, 26CH
Projection distance	4-30m
Shell material	ABS
Dimmer	0-100% linear dimmer
Strobe	1-25time/s
IP rating	IP 20
Accessories	Hanging bridge, power cable, signal cable
Net weight	13kg
Body size	436*230*500mm


Product details



As same as Martin Aura channel layout, can call the scan library to control directly

14CH	1	2	3	4	5	6	7	8	9	10	11	12	13	14
%	Shutter	Beam Dimmer	Zoom	Pan	Pan fine	Tilt	Tilt fine	Fixtures Control setting	Color wheel effect	Red	Green	Blue	White	Beam CCT

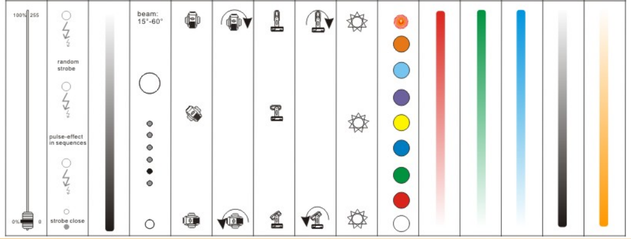

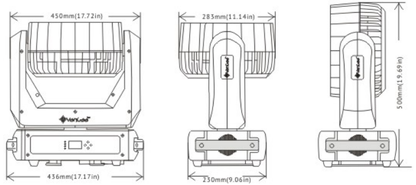



Aura 19pcs 15W LED Moving Head Beam Wash Light




Specification	
Product model	Swift 1915Z
Light sources	19pcs 15W RGBW 4in1 LED lamp
Input power	AC90-240V, 50/60Hz
Power	250W
Beam angle	10-60degree
Control mode	DMX-512; Master/slave; Demo
Control panel	LCD display+4 buttons
DMX channel	14CH
Projection distance	4-30m
Shell material	ABS
Dimmer	0-100% linear dimmer
Strobe	1-25time/s
IP rating	IP 20
Accessories	Hanging bridge, power cable, signal cable
Net weight	9.2kg
Body size	325*188*395mm

Product details




As same as Martin Aura channel layout, can call the scan library to control directly


14CH	1	2	3	4	5	6	7	8	9	10	11	12	13	14
%	Shutter	Beam Dimmer	Zoom	Pan	Pan fine	Tilt	Tilt fine	Fixtures Control setting	Color wheel effect	Red	Green	Blue	White	Beam CCT

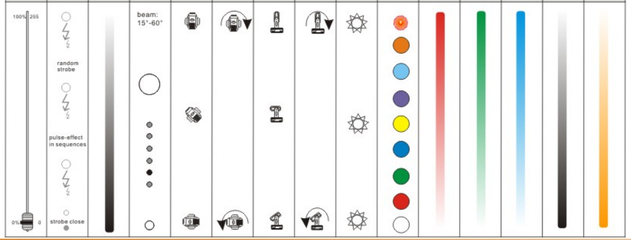





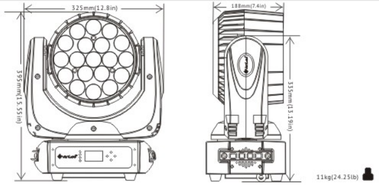



Aura 7pcs 40W LED Moving Head Beam Wash Light




Specification	
Product model	Swift 740
Light sources	7pcs 40W RGBW 4in1 LED lamp
Input power	AC90-240V, 50/60Hz
Power	320W
Beam angle	10-60degree
Control mode	DMX-512; Master/slave; Demo
Control panel	LCD display+4 buttons
DMX channel	14CH
Projection distance	4-30m
Shell material	ABS
Dimmer	0-100% linear dimmer
Strobe	1-25time/s
IP rating	IP 20
Accessories	Hanging bridge, power cable, signal cable
Net weight	9.2kg
Body size	325*188*395mm


Product details



As same as Martin Aura channel layout, can call the scan library to control directly

14CH	1	2	3	4	5	6	7	8	9	10	11	12	13	14
%	Shutter	Beam Dimmer	Zoom	Pan	Pan fine	Tilt	Tilt fine	Fixtures Control setting	Color wheel effect	Red	Green	Blue	White	Beam CCT
100% 255	random strobe		beam: 15°-60°											
0% 0	pulse-effect in sequences													
	strobe close													

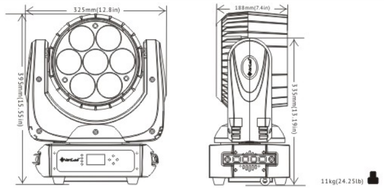



4 Heads 32W LED DJ Moving Head Beam Spot Light




Specification	
Product model	VG-4HS432D
Light sources	4pcs 32W RGBW 4in1 brightness LED lamps
Input power	AC90-240V, 50/60Hz
Power	150W
Beam angle	8degree
Control mode	DMX-512; Master/slave; Demo; Sound active
Control panel	LCD display+4 buttons
DMX channel	6CH/10CH/19CH/32CH/56CH
Projection distance	4-30m
Pan/tilt	540/270degree
Dimmer	0-100% linear dimmer
Strobe	1-25time/s
IP rating	IP 20
Accessories	Power cable, signal cable
Net weight	11kg
Body size	1050*90*260mm

Pr Product details



10CH	1	2	3	4	5	6	7	8	9	10
%	Pan	Tilt	Dimmer	Strobe	Function	Speed	Color	Color chasing	Pan fine	Tilt fine
100% 255				random strobe	Macro	Max Show Mode Speed Min		Fast Color chasing Speed Slow		
0% 0				pulse-effect in sequences						
				strobe close						










380W 3in1 Spot Beam Wash Moving Head Light



Specification	
Product model	VG-MH380
Light sources	brand 380W Lamp
Input power	AC90-240V, 50/60Hz
Power	580W
Beam angle	2.5°
Zoom angle	2.5°-65°
Static gobo wheel	11 fixed gobos+ white and effect gobo
Rotating gobo wheel	7 gobos+ white
Color wheel	13 color + white
Prism	25 and 16 facets circular rotating prism
Frost	100% frost
DMX channels	12CH, 24CH
Control mode	DMX512/Master-slave/Auto-run/Sound active
IP rating	IP 20
Accessories	Hanging bridge, power cable, signal cable
Net weight	22kg
Dimension	410Dx310Wx625Hmm

Product details





22kg(48.5lb)



Effect Gobo Wheel



Static Gobo Wheel



Rotation Gobo Wheel





24CH	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
%	Pan	Pan fine	Tilt	Tilt fine	Pan/Tilt Speed	Macro	Color wheel	Half color	Effect gobo	Static gobo	Rotation gobo	Rotation gobo adjustment	Rotation gobo fine	Prism	Prism rotation	Frost	Zoom	Zoom fine	Focus	Focus fine	Auto focus	Blank	Strobe	Dimmer


Features

- 2.5-65degree zoom range, can realize spot beam wash different scenes request;
- 1pcs static gobo wheel with 11 fixed gobos, 1pcs rotation gobo wheel with 7 rotation gobos and 1pcs effect gobo wheel to make sure different gobo effect optional during using;
- 25 and 16 facets circular rotating prism make the prism effect is very wonderful;
- With 100% frost functions;

Application



Effect

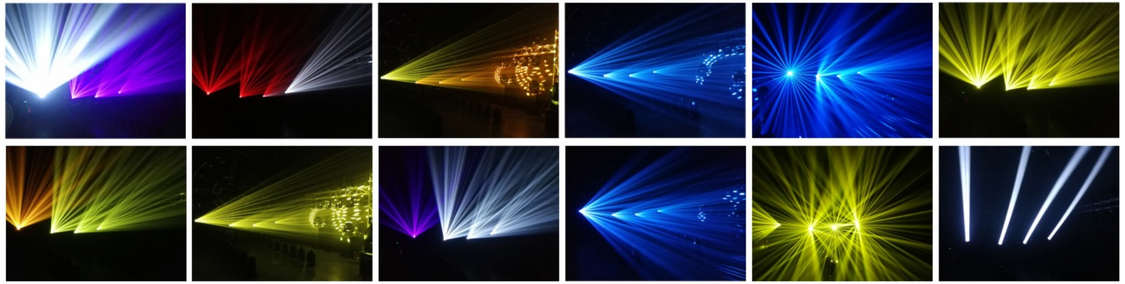

Manufacturing&Package



350W 17R 3in1 Spot Beam Wash Moving Head Light




Specification	
Product model	VG-MH350B
Light sources	brand 17R 350W Lamp
Input power	AC90-240V, 50/60Hz
Power	550W
Beam angle	2.5°
Zoom angle	2.5°-65°
Static gobo wheel	11 fixed gobos+ white and effect gobo
Rotating gobo wheel	7 gobos+ white
Color wheel	13 color + white
Prism	25 and 16 facets circular rotating prism
Frost	100% frost
DMX channels	12CH, 24CH
Control mode	DMX512/Master-slave/Auto-run/Sound active
IP rating	IP 20
Accessories	Hanging bridge, power cable, signal cable
Net weight	22kg
Dimension	410Dx310Wx625Hmm

Product details







22kg(48.5lb)



Effect Gobo Wheel



Static Gobo Wheel



Rotation Gobo Wheel

24CH	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
%	Pan	Pan fine	Tilt	Tilt fine	Pan/Tilt Speed	Macro	Color wheel	Half color	Effect gobo	Static gobo	Rotation gobo	Rotation gobo adjustment	Rotation gobo fine	Prism	Prism rotation	Frost	Zoom	Zoom fine	Focus	Focus fine	Auto focus	Blank	Strobe	Dimmer





350W 17R 3in1 Moving Head Spot Beam Light




Specification	
Product model	VG-MH350A
Light sources	350W 17R lamp
Input power	AC90-240V, 50/60Hz
Power	550W
Life span of lamp	2000h
Color wheel	13 colors + white
Gobo wheel	12 rotation gobos, 17 fixed gobos, with gobo rotation function
Control panel	LCD display + 4 buttons
DMX channel	16CH/24CH
Prism	1pc 12-prism
Dimmer	0-100% linear dimmer
Strobe	1-25time/s
Zoom angle	2.5-42degree
Accessories	Hanging bridge, power cable, signal cable
Net weight	21kg
Body size	380*240*590mm

Product details













24CH	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
%	Pan	Pan fine	Tilt	Tilt fine	Pan/Tilt Speed	Macro	Color wheel	Half color	Gobo 2 speed	Gobo wheel 1	Gobo wheel 2	Rotating gobo	Rotating gobo fine	Prism	Prism rotation	Frost	Zoom	Zoom fine	Focus	Focus fine	Auto focus	Strobe	Dimmer	Blank

Supper Beam Moving Head Light



Specification		
Product model	VG-SB330	VG-SB260
Light sources	YODN 330 16R	YODN 260
Input power	AC110-240V, 50/60Hz	AC110-240V, 50/60Hz
Power	330W	260W
Pan	540degree(16bit)	540degree(16bit)
Tilt	270degree(16bit)	270degree(16bit)
Control panel	LCD display+4 buttons	LCD display+4 buttons
DMX channel	18CH	18CH
Projection distance	5-100m	5-100m
Color wheel	13 colors + white	13 colors + white
Gobo wheel	13 gobos + white	13 gobos + white
Strobe	1-13time/s	1-13time/s
IP rating	IP 20	IP 20
Accessories	Power cable, signal cable	Power cable, signal cable
Net weight	18kg	18kg
Body size	330*230*590mm	330*230*590mm

Product details

280W 10R 3in1 Moving Head Spot Beam Wash Light



Specification	
Product model	VG-MH280A
Light sources	280W 10R Lamp
Input power	AC110-240V, 50/60Hz
Power	400W
Beam angle	8.7degree~23degree
Static Gobo wheel	with 14 fixed gobos, at variable rotation
Rotating Gobo wheel	9 bidirectional and indexable gobos
Color wheel	13 dichroic filters + white
Atomizing angle	60degree
Focus	linear adjustment
DMX channel	17CH, 24CH
Strobe	1-13time/s
IP rating	IP 20
Accessories	Power cable, signal cable
Net weight	18.5kg
Body size	D380*W240*H900mm

440W Outdoor Moving Head Spot Beam Light



Specification	
Product model	VG-WMH440
Light sources	brand 440W Lamp
Input power	AC90-240V, 50/60Hz
Power	470W
Life span of lamp	2000h
Color wheel	14 colors + white
Gobo wheel	14 fixed gobos, with gobo rotation function
Prism	1pc 8 face prism(3 prism/16 prism optional)
Atomization	with atomization function, can achieve soft light effect
DMX channel	14CH, 18CH
Dimmer	0-100% linear dimmer
Strobe	1-25time/s
Beam angle	2degree
Accessories	Hanging bridge, power cable, signal cable
Net weight	32.5kg
Body size	D430*W400*H780mm

Product details

17R 350W Outdoor Moving Head Spot Beam Light



Specification	
Product model	VG-WMH350
Light sources	350W 17R lamp
Input power	AC90-240V, 50/60Hz
Power	400W
Life span of lamp	2000h
Color wheel	14 colors + white
Gobo wheel	17 fixed gobos, with gobo rotation function
Control panel	LCD display + 4 buttons
DMX channel	16CH/20CH
Prism	1pc 8 faces-prism
Dimmer	0-100% linear dimmer
Strobe	1-25time/s
Beam angle	0-2.3degree
Accessories	Hanging bridge, power cable, signal cable
IP rating	Ip55
Net weight	28kg
Body size	456*406*866mm

Quick Locker Style 200W LED Audience Blinder Light




Specification		
Product model	VG-AB2-QL	VG-AB2-B-QL
Light sources	2pcs 100W/200W COB LED Lamps	2pcs bi-color 200W COB LED Lamps
Input power	AC90-240V, 50/60Hz	AC90-240V, 50/60Hz
Power	220W/350W	220W/350W
Beam angle	45°	45°
CRI	Ra>80/93/95/97 optional	Ra>80/93/95/97 optional
Color temperature	warm white 3200K/ cold white 5600K	from 3200K-5600K
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Dimmer curve	4 curve speed ajudtable	4 curve speed ajudtable
Strobe	1-25 times/second, speed adjustable	1-25 times/second, speed adjustable
Projection distance	3-15m	3-15m
DMX channels	2CH, 3CH	3CH, 4CH
Control mode	DMX512/Master-slave/Auto-run	DMX512/Master-slave/Auto-run
IP rating	IP 20	IP 20
Accessories	quick locker, power cable, signal cable	quick locker, power cable, signal cable
Net weight	5.5kg	5.5kg
Dimension	400Dx177Wx200Hmm	400Dx177Wx200Hmm

Product details



5.5kg(12.13lb)

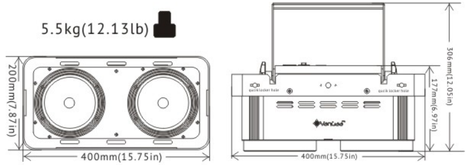


2CH Mode

2CH	1	2
%	Lamp 1 Dimmer	Lamp 2 Dimmer

3CH Mode

3CH	1	2	3
%	Lamp 1 Dimmer	Lamp 2 Dimmer	Strobe





Quick Locker

Different Connection Methods, Do What Shape You Want!!!



Features

- One light has 8 quick lockers, which can make sure four sides can connect the lights as you need;
- The quick locker is very easy to lock by hand, can operate even without any tools;
- Different CRI Ra80, Ra95, Ra97 LED chips are optional, not only can be the audience blinder light, but also can be the main face light for your stage;
- With 4 speed dimmer curve optional, can realize the effect as the traditional audience blinders
- Small size, elegant appearance, special design for markets.


Application



Effect



Manufacturing & Package

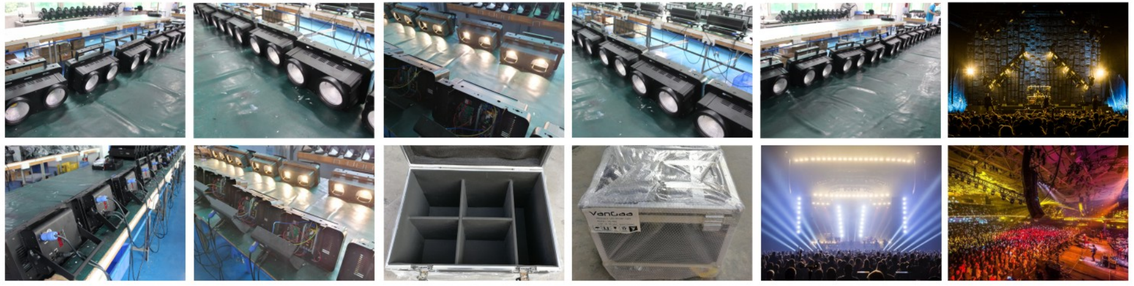

400W LED Audience Blinder Light



Specification	
Product model	VG-COB4-O
Light sources	4pcs 100W COB LED lamp (warm white/cool white/bi-color)
Input power	AC100-240V, 50/60Hz
Power	450W
Quantity of LED	4pcs 100W COB warm white LED lamps
Life span of LED	50000h
Beam angle	45degree
Dimmer	0-100% linear dimmer
Control panel	digital tube display+4 buttons
DMX channel	1/2/4/8CH
Working temp.	-25-+45℃
Cooling system	High quality radiator, fan without noise
Control mode	DMX512/Demo/Manual
IP rating	IP 65
Accessories	Handle, power cable, signal cable
Net weight	10.5kg
Body size	370*370*100mm

Product details





8CH	1	2	3	4	5	6	7	8
%	Dimmer	Lamp 1 Dimmer	Lamp 2 Dimmer	Lamp 3 Dimmer	Lamp 4 Dimmer	Strobe	Function Choose	Function Speed








400W LED Audience Blinder Light






Specification	
Product model	VG-AB4, VG-AB4-B
Light sources	4pcs 100W 3200K/5600K COB LED lamp, or bicolor COB LED
Input power	AC100-240V, 50/60Hz
Power	450W
Quantity of LED	4pcs 100W COB warm/cold white LED lamps
Life span of LED	50000h
Beam angle	45degree
Dimmer	0-100% linear dimmer
Control panel	digital tube display+4 buttons
DMX channel	1/2/4/8CH; 12CH(bicolor one)
Working temp.	-25-+45℃
Cooling system	High quality radiator, fan without noise
Control mode	DMX512/Demo/Manual
IP rating	IP 20
Accessories	Handle, power cable, signal cable
Net weight	10.5kg
Body size	350*370*200mm

200W LED Audience Blinder Light





Specification	
Product model	VG-AB2
Light sources	100W COB LED lamp
Input power	AC100-240V, 50/60Hz
Power	250W
Quantity of LED	2pcs 100W COB warm white LED lamps
Life span of LED	50000h
Beam angle	45degree
Dimmer	0-100% linear dimmer
Control panel	digital tube display+4 buttons
DMX channel	6CH
Working temp.	-25-+45℃
Cooling system	High quality radiator, fan without noise
Control mode	DMX512/Demo/Manual
IP rating	IP 20
Accessories	Handle, power cable, signal cable
Net weight	5.5kg
Body size	380*150*180mm


600W Long Lens LED Follow Spot Light




Specification	
Product model	VG-LFL600
Light sources	high brightness 600W LED lamp
Input power	AC90-240V, 50/60Hz
Power	680W
Beam angle	7°-13°
Color	seven color + white changeable, by color wheel
Color temperature	7500-8000K
CTO Wheel	3200K+4500K+5600K
Dimmer	0-100% linear dimmer
Projection distance	100-150m
Control mode	DMX-512; Manual
DMX channels	5CH
Strobe	1-20 times/second
IP rating	IP 20
Accessories	Tripods, power cable, signal cable, flight case package
Net weight	17.5kg
Dimension	775*263*213mm

Product details






5CH	1	2	3	4	5
%	Dimmer	Strobe	Iris	Color wheel	CTO wheel







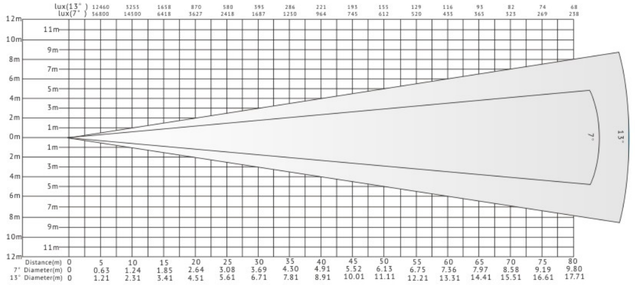

Features

- Equips high brightness 600W LED chip, which is very powerful, the brightness is more better than the 3000W lamp;
- Equips special lens group as the main optic, to realize the light output is brightness and can reach long distance;
- With the color wheel 7 colors+ white;
- With the color temperature wheel 3200K+4500K+5600K;
- Elegant appearance, easy operate, come with strong tripods and flight case package.

Application





Effect


Zoom Changeable 350W LED Follow Spot Light




Specification	
Product model	VG-LFL350C
Light sources	350W High brightness LED lamp more brightness than 1500w discharge lamp
Input power	AC100-240V, 50/60Hz
Color temperature	8000-8500K
Lifespan	more than 50000h
Luminous flux	20000-24000lux
Color wheel	5 colors + open white
CTO wheel	3200K, 4500K, 5600K
Iris	electric iris
Beam angle	7-13degree
Focus	Manual focus
Strobe	1-20 flash/s
IP rating	IP 20
Accessories	Power cable, user manial
Net weight	11.5kg
Body size	775*263*213mm

Product details



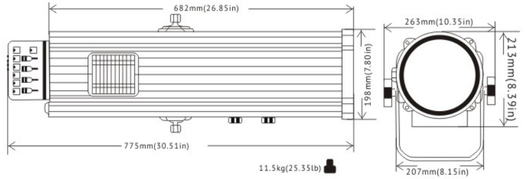


5CH	1	2	3	4	5
%	Color wheel	CTO	Iris	Dimmer	Strobe










Iris Function 350W LED Follow Spot Light




Specification	
Product model	VG-LFL350
Light sources	350W High brightness LED lamp more brightness than 1500w discharge lamp
Input power	AC100-240V, 50/60Hz
Color temperature	8000-8500K
Lifespan	more than 50000h
Luminous flux	20000-24000lux
Color wheel	5 colors + open white
CTO wheel	3200K, 4500K, 5600K
Iris	electric iris
Beam angle	10degree
Focus	Manual focus
Strobe	1-20 flash/s
IP rating	IP 20
Accessories	Power cable, user manial
Net weight	9.9kg
Body size	602*295*272mm

Product details



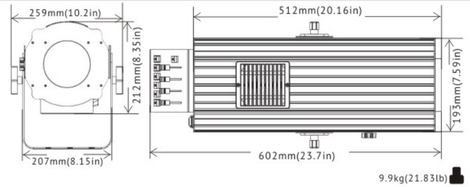



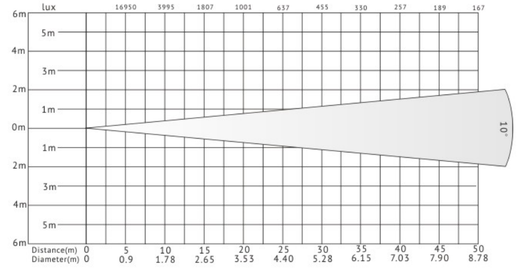


18pcs 18W 6in1 LED Wall Wash Light



Specification	(every lamp every color control solely)	
Product model	VG-LC1818H	VG-LC1818H-S
Light sources	18pcs 18W RGBWAUV 6in1 LED lamps	18pcs 18W RGBWAUV 6in1 LED lamps
Input power	AC90-240V, 50/60Hz	AC90-240V, 50/60Hz
Power	350W	350W
Beam angle	25°(15° optional)	25°(15° optional)
Color	RGBWAUV 6in1 color mixing	RGBWAUV 6in1 color mixing
Lifespan	50000h	50000h
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Projection distance	3-10m	3-10m
Control mode	DMX-512; Auto run	DMX-512; Auto run
DMX channels	6CH, 10CH, 108CH, 112CH	6CH, 10CH
Strobe	1-20 times/second	1-20 times/second
IP rating	IP 65	IP 65
Housing materials	Aluminum die casting	Aluminum die casting
Accessories	Waterproof Power cable, signal cable	Waterproof Power cable, signal cable
Net weight	8kg	8kg
Dimension	1000*92*171mm	1000*92*171mm

Product details





10CH	1	2	3	4	5	6	7	8	9	10
%	Dimmer	Red	Green	Blue	White	Purple	Yellow	Strobe	Function	Function speed




Features

- High Power 18pcs 18W 6in1 LED lamps, which can mix different true colors for different scenes;
- Every color of every led can be controlled solely, or the simple version only control the color together;
- Different built in programs, with water running effect, fade, jump, gradual change and other wonderful effects;
- Ip65 can suitable for outdoor rainstorm using;
- With rebreather can make sure the light is always drying inside.


Application



Effect

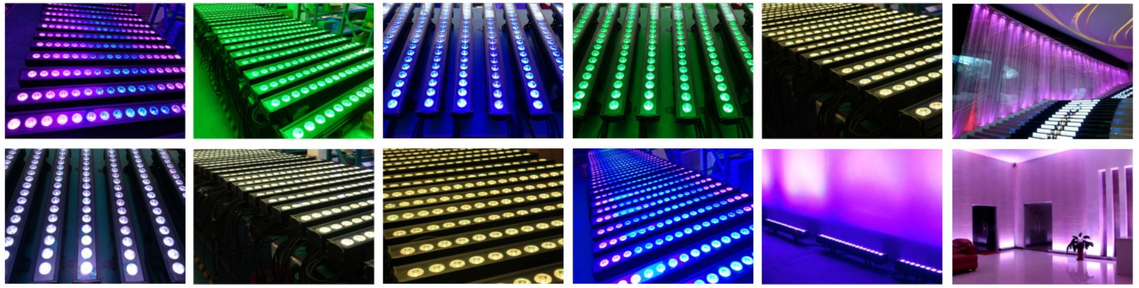

Manufacturing&Package

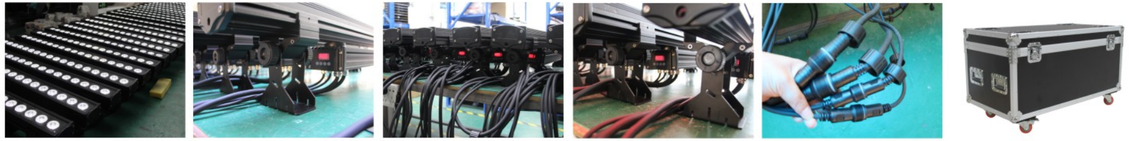


18pcs RGBW 4in1 Outdoor LED Wall Wash Light




Specification	(every lamp every color control solely)	
Product model	VG-LC1810D	VG-LC1810D-S
Light sources	18pcs 12W RGBW 4in1 LED lamps	18pcs 12W RGBW 4in1 LED lamps
Input power	AC90-240V, 50/60Hz	AC90-240V, 50/60Hz
Power	200W	200W
Beam angle	15°	15°
Color	RGBW 4in1 color mixing	RGBW 4in1 color mixing
Lifespan	50000h	50000h
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Projection distance	3-10m	3-10m
Control mode	DMX-512; Auto run	DMX-512; Auto run
DMX channels	32CH	8CH, 4CH
Strobe	1-20 times/second	1-20 times/second
IP rating	IP 65	IP 65
Housing materials	Aluminum die casting	Aluminum die casting
Accessories	Waterproof Power cable, signal cable	Waterproof Power cable, signal cable
Net weight	7.6kg	7.6kg
Dimension	1000*92*171mm	1000*92*171mm


Product details








8kg(17.64lb)

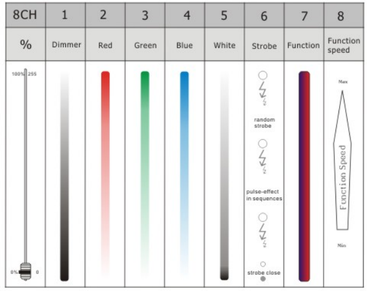

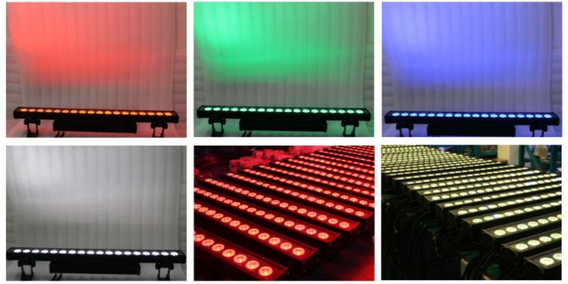


24pcs RGB 3in1 LED Wall Wash Light




Specification	
Product model	VG-LC243C
Light sources	24pcs RGB 3in1 LED lamps
Input power	AC90-240V, 50/60Hz
Power	100W
Beam angle	25°
Color	RGB 3in1 color mixing
Lifespan	50000h
Dimmer	0-100% linear dimmer
Projection distance	3-10m
Control mode	DMX-512; Auto run
DMX channels	8CH, 4CH
Strobe	1-20 times/second
IP rating	IP 65
Housing materials	Aluminum die casting
Accessories	Waterproof Power cable, signal cable
Net weight	4.5kg
Dimension	1020*80*120mm


Product details





4.5kg(9.92lb)

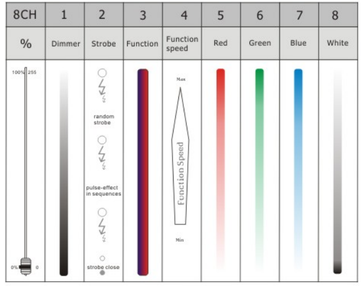






Max 1500W Outdoor LED Strobe Light




Specification	
Product model	VG-LST3000
Light sources	1320pcs RGBW 4in1 SMD LEDs
Input power	AC90-240V, 50/60Hz
Power	1500W max
Color	RGBW 4in1 color mixing, colorful
Dimmer	0-100% linear dimmer
Control panel	LCD display+4 buttons
DMX channel	4CH; 5CH; 7CH; 13CH; 15CH
Beam angle	120degree
Cooling system	Aluminum radiator, and mute Fan within 58db
Control mode	DMX512/Demo/Manual
IP rating	IP 65
Accessories	Power cable, signal cable
Net weight	12.5kg
Body size	D560*W230*H320mm
Body material	Aluminium die casting

Product details



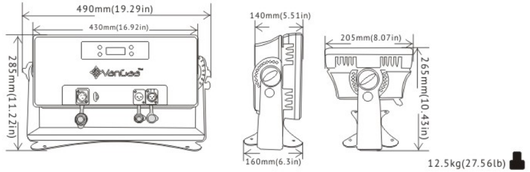

5CH	1	2	3	4	5
%	General dimmer	Red dimmer	Green dimmer	Blue dimmer	White dimmer




this light has 4CH, 5CH, 7CH, 13H, 15CH optional






Illuminance(lux)						
red	2100	585	250	160	120	
green	4050	1000	500	320	230	
blue	5300	1400	700	430	310	
white	6000	1500	750	470	340	
full	14500	4400	2200	1400	1000	

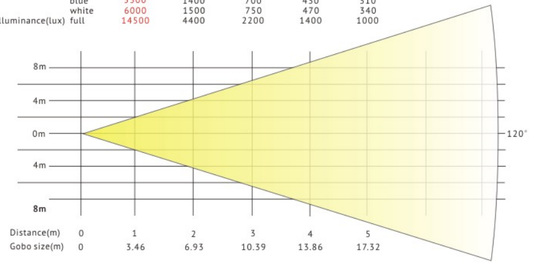


1000W High Power LED Strobe Light




Specification	
Product model	VG-LST1000
Light sources	64pcs Red SMD LEDs+64pcs Green SMD LEDs+64pcs Blue SMD LEDs+96pcs White SMD LEDs
Input power	AC90-240V, 50/60Hz
Power	1000W
Beam angle	120°
Color	RGBW color mixing
Lifespan	50000h
Dimmer	0-100% linear dimmer
Projection distance	3-15m
Control mode	DMX-512; Auto run
DMX channels	4CH, 10CH, 14CH, 17CH, 29CH
Strobe	1-25 times/second
IP rating	IP 20
Housing materials	Aluminum die casting
Accessories	Waterproof Power cable, signal cable
Net weight	9kg
Dimension	485*152*300mm

Product details





10CH	1	2	3	4	5	6	7	8	9	10
%	Dimmer white 1	Dimmer white 1	Dimmer white 1	Dimmer white 1	Dimmer red 1	Dimmer red 2	Dimmer green 1	Dimmer green 2	Dimmer blue 1	Dimmer blue 1



this light has 4CH, 19CH, 27CH, 10H, 14CH optional







Outdoor Colorful 5in1 LED Flat Par Light



Specification	
Product model	Flat 725G
Light sources	7pcs 25W RGBWA 5in1 LED Lamp
Input power	AC90-240V, 50/60Hz
Power	140W
Life span	500,000h
Color	RGBWA color mixing
Beam angle	20degree/30degree/60degree
Control panel	Digital tube + 4 buttons
DMX channel	5CH, 8CH
Control mode	DMX-512; Master/slave mode; Demo mode
Dimmer	0-100% linear dimmer
Strobe	1-25time/s
Body material	Aluminum die casting
Accessories	Power cable, signal cable
IP rating	IP 65
Net weight	6.2kg
Body size	270*256*145mm(without handle), 270*256*310mm(with handle)

54pcs 4in1/RGBW Outdoor LED Par Light



Specification		
Product model	VG-LP5412D	VG-LP354B
Light sources	54pcs 10W RGBW 4in1 LED lamps	54pcs 3W RGBW LED(R:12; G:14; B:14;W:14)
Input power	AC90-240V, 50/60Hz	AC90-240V, 50/60Hz
Power	200W, power factor PF≥0.95	165W, power factor PF≥0.95
Life span	500,000h	500,000h
Color	RGBW 4in1 color mixing	RGBW color mixing
Beam angle	20degree/45degree optional	15degree/60degree optional
Control panel	Digital tube + 4 buttons	Digital tube + 4 buttons
DMX channel	4CH, 9CH	4CH, 9CH
Control mode	DMX-512; Master/slave mode; Demo mode	DMX-512; Master/slave mode; Demo mode
Dimmer	0-100% linear dimmer	0-100% linear dimmer
Strobe	1-25time/s	1-25time/s
Body material	Aluminum die casting	Aluminum die casting
Accessories	Power cable, signal cable	Power cable, signal cable
IP rating	IP 67	IP 67
Net weight	9.5kg	9kg
Effect	3200k-10000K color temperature line adjust	3200k-10000K color temperature line adjust

18pcs 6in1 LED Outdoor Par Light



Specification	
Product model	VG-LP1818H
Light sources	18pcs 6in1 RGBWAUV LED lamps
Input power	AC90-240V, 50/60Hz
Power	200W
Beam angle	25degree(45 degree is optional)
Control mode	DMX-512; Master/slave; Demo
Control panel	Digital tube display+4 buttons
DMX channel	10CH
Projection distance	4-15m
Shell material	Aluminum die casting
Dimmer	0-100% linear dimmer
Strobe	1-25time/s
IP rating	IP 65
Accessories	Power cable, signal cable
Net weight	7kg
Body size	260*330*350mm

54pcs 3W RGBW Outdoor LED Par Light



Specification	
Product model	VG-LP543B
Light sources	54pcs 3W RGBW LED lamps
Input power	AC90-240V, 50/60Hz
Power	200W
Quantity of LED	R: 12; G: 14; B: 14; W: 14
Life span of LED	50000h
Beam angle	15/25/45/60degree
Dimmer	0-100% linear dimmer
Control panel	Digital tube display + 4 buttons
DMX channel	8CH
IP rating	IP 65
Cooling system	Cooling by die casting aluminum shell
Control mode	DMX-512; Master/slave; Demo
Accessories	Power cable, signal cable
Net weight	8.5kg
Body size	350*290*290mm

18pcs 6in1 Slim Outdoor LED Par Light



Specification	
Product model	VG-LP1818HS
Light sources	18W RGBWAUV 6in1 LED lamps
Input power	AC90-240V, 50/60Hz
Power	200W
Quantity of LED	18pcs 18W RGBWAUV 6in1 LED lamps
Life span of LED	50000h
Beam angle	25degree
Dimmer	0-100% linear dimmer
Control panel	Digital tube display + 4 buttons
DMX channel	8CH
IP rating	IP 65
Cooling system	Cooling by die casting aluminum shell
Control mode	DMX-512; Master/slave; Demo
Accessories	Power cable, signal cable
Net weight	7kg
Body size	260*330*350mm

200W Warm White Outdoor COB LED Par Light



Specification	
Product model	VG-LP200-B
Light sources	1pc 200W COB warm white LED lamp
Input power	AC90-240V, 50/60Hz
Power	250W
Life span	500,000h
Color	golden white
Beam angle	30degree
Control panel	Digital tube + 4 buttons
DMX channel	5CH
Control mode	DMX-512; Master/slave mode; Demo mode
Dimmer	0-100% linear dimmer
Strobe	1-25time/s
Body material	Aluminum die casting
Accessories	Power cable, signal cable
IP rating	IP 65
Net weight	9.5kg
Body size	240*270*268mm

18pcs 6in1 Indoor LED Par Light



Specification	
Product model	VG-LPI1818H
Light sources	18pcs 6in1 RGBWAUV LED lamps
Input power	AC90-240V, 50/60Hz
Power	200W
Beam angle	25degree(45 degree is optional)
Control mode	DMX-512; Master/slave; Demo
Control panel	Digital tube display+4 buttons
DMX channel	10CH
Projection distance	4-15m
Shell material	Aluminum alloy
Dimmer	0-100% linear dimmer
Strobe	1-25time/s
IP rating	IP 20
Accessories	Power cable, signal cable
Net weight	3kg
Body size	260*260*400mm

54pcs 3W RGBW Indoor LED Par Light



Specification	
Product model	VG-LPI543B
Light sources	54pcs 3W RGBW LED lamps
Input power	AC90-240V, 50/60Hz
Power	200W
Quantity of LED	R: 12; G: 14; B: 14; W: 14
Life span of LED	50000h
Beam angle	15/25/45/60degree
Dimmer	0-100% linear dimmer
Control panel	Digital tube display + 4 buttons
DMX channel	8CH
IP rating	IP 20
Cooling system	Active cooling by mute fan
Control mode	DMX-512; Master/slave; Demo
Accessories	Power cable, signal cable
Net weight	3.5kg
Body size	260*260*380mm

2.4G Wireless DMX Transmitter and Receiver



Specification	
Product model	VG-DWR2014
Signal strength	2.4G
Signal style	Sweden Wireless Solution
Receiving distance	500m(without obstruct)
Control panel	1 buttons
Power supply	common power supply
Input voltage	AC100V/240V, 50/60Hz
Power consumption	6W
Shell material	Aluminum alloy
Appearance color	black
IP rating	IP 20
Accessories	Power cable, C connector
Net weight	1.1kg

Outdoor 2.4G Wireless DMX Transmitter and Receiver



Specification	
Product model	VG-OWS2018
Signal strength	2.4G
Signal style	Sweden Wireless Solution
Receiving distance	500m(without obstruct)
Control panel	1 buttons
Power supply	common power supply
Input voltage	AC100V/240V, 50/60Hz
Power consumption	6W
Shell material	Aluminum alloy
Appearance color	black
IP rating	IP 65
Accessories	Power cable, C connector
Net weight	2.5kg

2 DMX In 8 DMX Out DMX Splitter



Specification	
Product model	VG-SP2-8A
Ports	2 DMX in, 8 DMX out
Ports style	3pins or 5pins
Input power	AC230V, 50Hz, or AC110V, 50Hz/60Hz
Power consumption	12W
Machine size	482*155 x 45mm (19" Rack, 1U)
Net weight	3kg

1 DMX In 8 DMX Out DMX Splitter Light



Specification	
Product model	VG-SP1-8A
Ports	1 DMX in, 8 DMX out
Ports style	3pins or 5pins
Input power	AC230V, 50Hz, or AC110V, 50Hz/60Hz
Power consumption	10W
Machine size	280*150*70mm
Net weight	2kg

1 DMX In 8 DMX Out DMX Splitter Light



Specification	
Product model	VG-SP1-8B
Ports	1 DMX in, 8 DMX out
Ports style	3pins or 5pins
Input power	AC230V, 50Hz, or AC110V, 50Hz/60Hz
Power consumption	12W
Machine size	482*155*45mm (19" Rack, 1U)
Net weight	3kg

Sunlite Suite



Specification	
Product model	VG-Sunlite1, VG-Sunlite2
Software version	Sunlite 1, sunlite 2 optional
Controllable DMX512 channels	1024
Max fixtures	120
Max fixture channels	32
Direct call of scenes	30
Chase program	30
Power supply	USB or CE standard 9V adapter(option)
DMX output	2 DMX output (each 512CH)
Computer support	Support with PC working and off
Visualization	Support 3D simulation
Input voltage	DC9V-12V
Current	no less than 300mA
Body size	89*76*41mm

384 DMX Channels DMX-512 Console



Specification	
Product model	VG-DC384
Controllable DMX 512 channels	384
Max fixtures	30
Max fixture channels	32
Direct call of scenes	30
Chase program	30
Chase speed range	0.03s-180s
Chase trigger mode	Auto, music, swing
Chase direction control	Forward/inversion
Shape control	Yes, up to 50 SHAPE generators
LCD monitor	Yes
Flash-card port	Yes
Power	5W
Body size	485*267*85mm

48 Faders Studio Light DMX Console



Specification	
Product model	VG-DC48
Input power	AC90-240V, 50/60Hz
Power consumption	5W
Feature	• DMX512/1990 standard, 48 DMX channels, output with optical isolated. • 48 dimming channels, 48 preset fader. • 12 sub-master fader, 96 scenes (8 pages). • 48 Chases, up to 240 steps each. • Trigger mode selectable: Music synchronously or Auto. • LCD display with backlight.



VG-C18



VG-C1



VG-C8s



VG-C2s



VG-S4



VG-S180



VG-S280B



VG-S280C



VG-LC003



VG-LC001



VG-LC004



VG-LC006



VG-PT2.5



VG-TR3



VG-RD002



VG-TDS1.5

Some Cooperative Enterprises and Institutions


China Mobile Communication Corporation
China Unicom Communication Corporation
Sinopec
China Post
China Merchants Bank
Industrial and Commercial Bank of China
China Police
Land and Resources Bureau of Jiangsu Province
Beijing Media University
Shantou University
Zhejiang Police College
.....



Lecture Hall of China Mobile



Theater in Cyprus

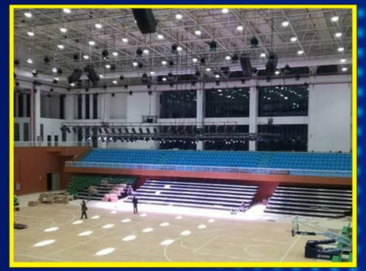

Auditorium of Shaoguan College



Lecture Hall of ICBC Hubei Province



Theater of Dinghu College



Studio Room of Xiangtan TV Station



Shiyan TV Station



TV Station of Kaiyuan City, Yunnan



Studio Room of Guangdong Normal University



The Show in USA



The Show in Austria



Square Dance Competition in Hebei



Wedding Celebration



Night Club in Foshan



Event in Togo



Event in Estonia

Innovation, Quality and Performance
Create a better experience the feeling of light
VanGaa, Achieving Users' Value